

BLADE2 series LED

INSTALLATION PROCEDURE, INDIVIDUAL UNITS




DO NOT DISCARD

PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.


Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.

Before Beginning Installation, Locate The Following Components. Gather Required Tools.

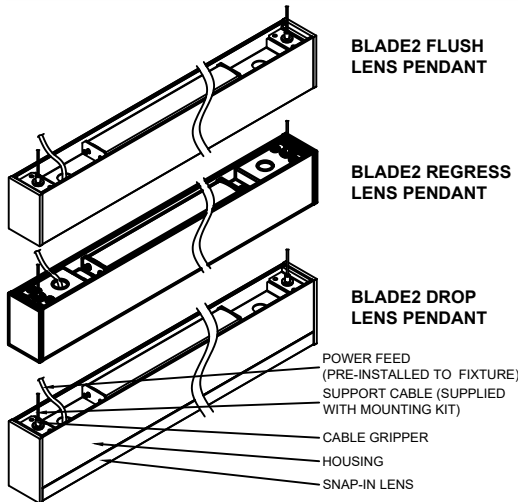

Tools Required (Not Provided)

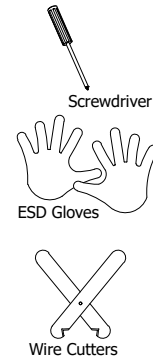

Service Hotline: (201) 246-8188
Monday through Friday 9:00AM - 5:00PM

BLADE2 FIXTURE HAS EXTERNAL LED DRIVER(S) AND LOW VOLTAGE POWER FEED.


PLEASE SEE SEPARATE INSTALLATION INSTRUCTION FOR REMOTE POWER SUPPLY AND SUPPORT/MOUNTING OPTIONS.

To Begin Installation:

POWER OFF

1


LV1CR CANOPY SHOWN



1. Install power supply assembly to the ceiling according to lighting plan and/or approved submittal drawing(s). Install remote LED driver enclosure (see separate Installation Instruction) and bring low voltage fixture power feed to the J-box. Lower power feed canopy to have an access for wire splicing.


2

LV1CR CANOPY SHOWN




2. Install support assembly to the ceiling according to lighting plan and/or approved submittal drawing(s).

3



3. Bring support cable to the fixture gripper. Press gripper plunger, and insert aircraft cable into gripper. Release plunger. Repeat this procedure for another support cable. Adjust the fixture height and level as needed.

4



4. Make J-box connections as required in accordance with all applicable codes. Obey wire color codes (see on left). Replace power feed canopy. Secure canopy with gripper knurled nut. Adjust fixture height and/or lever if required.

Installation and maintenance of the **BLADE2** luminaire may only be performed by qualified and licensed electricians in accordance with all applicable codes and standards. Picasso Lighting Industries, LLC assumes no responsibility or liability for any unauthorized changes or modifications to the **BLADE2** luminaire. The **BLADE2** luminaire is not intended for outdoor use. Picasso Lighting Industries, LLC. shall assume no responsibility or liability for the integrity of the mounting surface and structure as well as the integrity of all components not provided by Picasso Lighting Industries, LLC. Turn off line voltage and allow luminaire to completely cool before performing any maintenance including routine cleaning of luminaire. Avoid touching LED light emitting surfaces while installing, replacing or providing maintenance to the luminaire. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Color temperature (k) is subject to a tolerance of +/- 150k from the nominal value. Any component contained in this luminaire can only be replaced by the manufacturer or an agent thereof.

Keep these **INSTALLATION INSTRUCTIONS** in a secure and readily accessible place for any future maintenance or for reference.

DO NOT DISCARD

PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.