

Five Series, STEM

INSTALLATION PROCEDURE, INDIVIDUAL UNITS



DO NOT DISCARD

PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.

Fixtures must be installed by licensed electricians in accordance with all local and national codes.


To prevent electrical shock, disconnect electrical supply before installing or servicing.

Before Beginning Installation, Locate The Following Components. Gather Required Tools.


IMPORTANT SAFEGUARDS: When using electrical equipment, always adhere to basic safety precautions including the following: The battery in this unit may not be fully charged. After electricity is connected to unit, let battery charge for at least 48 hours, then normal operation of this unit should take effect.

READ AND FOLLOW ALL SAFETY INSTRUCTIONS


1. Do not use outdoors.
2. Equipment should be mounted securely in locations and at heights where it will not be readily subjected to tampering by unauthorized personnel.
3. Do not mount near gas or electric heaters.
4. Do not use this equipment for anything other than its intended use.
5. The use of accessory equipment not recommended by the manufacturer will void product listing and warranty and may cause an unsafe condition.
6. Disconnect AC power before servicing and installation.
7. Use caution when servicing batteries.
8. Any service on this equipment should be performed by qualified personnel only.
9. Cap unused wires with enclosed wire nuts or other approved method.
10. Make sure wire terminations are secure and leads are properly tucked in appropriate wireways.

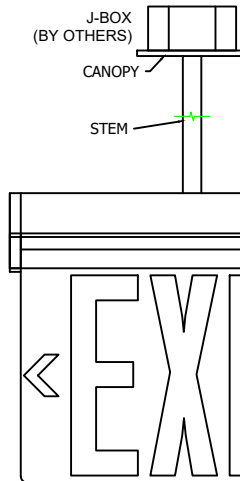

Service Hotline: (201) 246-8188
Monday through Friday 9:00AM - 5:00PM

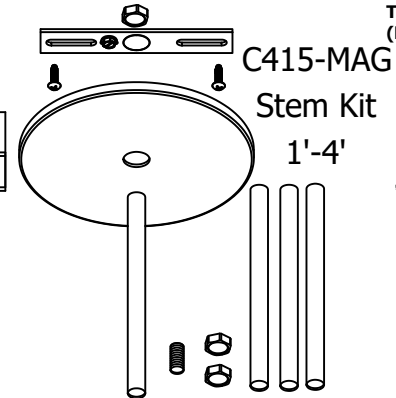

Tools Required (Not Provided)

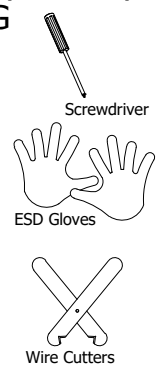

To Begin Installation:

POWER OFF

Installation Instructions

1. Install J-box (by others) and support to structure
2. Secure Cross Bar to Junction Box.
3. Screw Stem Sections together for 1', 2', 3' or 4' Lengths, Secure Stem to Cross bar and slide Canopy on Stem. Install Nipple and NUT to bottom of stem Assembly
4. Feed the AC input leads (by others) (black, white, green) through the Stem from the Junction Box.
5. Open the front housing cover of Exit Sign. Remove Bushing and pull leads into Housing Body.
6. Secure Stem to Housing and secure with nut from the Inside (provided).
7. Connect AC input leads to AC power supply leads. Connect Wires: Black to 120/277VAC Power Supply, white to neutral, Green to Ground.
8. Re-Install Front Housing Cover.
9. Slide Canopy up to J-Box. Canopy held in place via magnets on cross bar.
10. Install Chevron directional indicators using template as required.
11. Turn on Power, Allow 48 Hour Continuous Operation to Charge Battery.

Wiring Diagram

