



PICASSO LIGHTING INDUSTRIES, LLC
46 Sellers Street, Kearny, NJ 07032
201.246.8188

Indoor Distribution Test Report

Picasso Lighting Industries, LLC

46 Sellers St.
Kearny, NJ 07032

Photopia Photometric Analysis & Optical Design

Catalog Number

APX-PR-4x6-D7-I7-30-80-OW/MC

APEX 4'x6" - Sound Absorbing Panels - Direct/Indirect - Opal White/Matte Clear Lenses

Test Number

IES-P00262

Test Date

Fri Oct 11 11:28:02 2019

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Picasso Lighting Industries, LLC.

APX-PR-4x6-D7-I7-30-80-OW/MC
APEX 4'x6" - Sound Absorbing Panels - Direct/Indirect - Opal White/Matte Clear Lenses
LED (3000K 80+ CRI)



Image may differ slightly from actual unit.

Summary of Results

Output:

Watts:	67.12 W
Lumens:	6,140.14 lm
Efficiency:	N/A
Efficacy:	89.56 lm/W

Spacing Criterion


Two luminaires, plane 0°	1.21
Two luminaires, plane 90°	1.17
Four luminaires	1.3

Full Beam Angle

0° - 180°	256.88°
90° - 270°	258.78°

Calculated results may not be representative of field performance.
Ballast factors have not been applied.

Candela Polar Plot

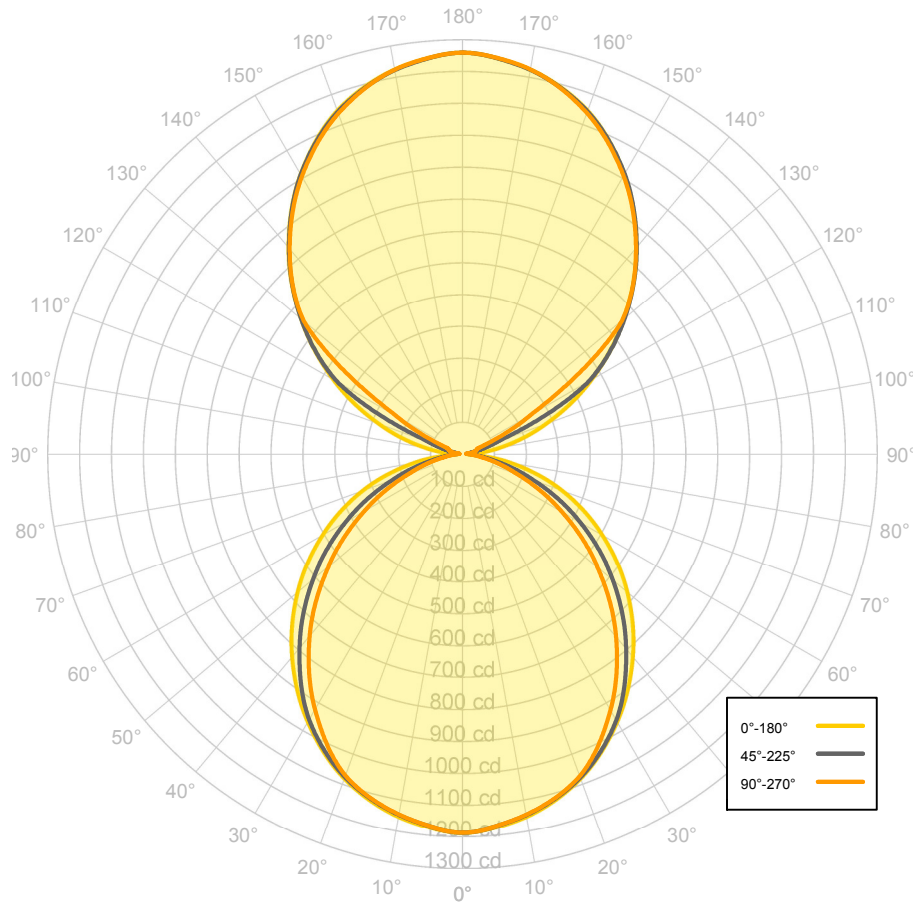

Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0° - 10°	200.58	3.27%	90° - 100°	34.93	0.57%
10° - 20°	311.83	5.08%	100° - 110°	108.29	1.76%
20° - 30°	464.15	7.56%	100° - 120°	379.87	6.19%
30° - 40°	542.00	8.83%	120° - 130°	469.25	7.64%
40° - 50°	538.28	8.77%	130° - 140°	576.44	9.39%
50° - 60°	460.64	7.50%	140° - 150°	576.59	9.39%
60° - 70°	326.69	5.32%	150° - 160°	491.70	8.01%
70° - 80°	170.73	2.78%	160° - 170°	330.65	5.38%
80° - 90°	52.91	0.86%	170° - 180°	212.90	3.47%
0° - 90°	3,067.82	49.96%	0° - 180°	6,140.14	100.00%



Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°
0.00°	1,189.31	1,189.31	1,189.31	1,189.31	1,189.31
10.00°	1,155.18	1,152.89	1,152.19	1,151.67	1,150.91
20.00°	1,082.48	1,081.72	1,080.95	1,077.30	1,076.10
30.00°	969.74	972.44	964.80	940.12	927.92
40.00°	830.64	833.42	797.53	762.37	748.36
50.00°	674.14	667.52	614.35	567.58	550.75
60.00°	506.06	486.25	421.16	370.45	353.29
70.00°	333.07	296.44	228.71	186.94	174.18
80.00°	153.61	110.24	70.22	59.11	56.99
90.00°	17.08	10.93	11.06	10.85	10.94
100.00°	118.54	63.30	32.94	36.95	38.09
110.00°	278.03	275.10	126.44	53.72	51.63
120.00°	467.01	472.60	459.13	326.55	251.99
130.00°	659.72	665.76	664.11	658.55	654.33
140.00°	848.19	853.74	849.17	847.75	845.86
150.00°	1,014.48	1,015.98	1,015.72	1,012.00	1,008.75
160.00°	1,147.09	1,144.00	1,144.09	1,141.51	1,138.79
170.00°	1,225.18	1,229.52	1,223.73	1,223.70	1,225.46
180.00°	1,259.40	1,259.40	1,259.40	1,259.40	1,259.40

Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
0.00°	14,112	14,112	14,112
45.00°	11,210	4,501	3,426
55.00°	10,342	3,216	2,272
65.00°	9,269	2,027	1,304
75.00°	7,582	966	580
85.00°	4,755	282	178



Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

	pf_c	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
	pc_c	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
RCR	0	6,578	6,578	6,578	6,578	6,068	6,068	6,068	6,068	5,116	5,116	5,116	4,244	4,244	4,244	3,444	3,444	3,444	3,068
	1	6,016	5,755	5,521	5,310	5,542	5,319	5,119	4,937	4,503	4,359	4,226	3,754	3,653	3,559	3,063	2,995	2,933	2,609
	2	5,490	5,044	4,675	4,365	5,051	4,669	4,349	4,078	3,964	3,728	3,525	3,314	3,145	2,997	2,713	2,597	2,493	2,209
	3	5,019	4,447	4,006	3,654	4,615	4,123	3,737	3,425	3,511	3,221	2,982	2,945	2,732	2,553	2,419	2,269	2,140	1,890
	4	4,600	3,948	3,470	3,105	4,230	3,665	3,245	2,920	3,131	2,810	2,556	2,636	2,397	2,203	2,174	2,002	1,859	1,638
	5	4,230	3,528	3,037	2,675	3,891	3,280	2,846	2,521	2,812	2,476	2,218	2,376	2,122	1,923	1,969	1,783	1,634	1,436
	6	3,904	3,173	2,682	2,330	3,594	2,955	2,518	2,201	2,542	2,201	1,946	2,157	1,895	1,696	1,796	1,602	1,450	1,274
	7	3,615	2,871	2,389	2,051	3,331	2,679	2,247	1,941	2,313	1,972	1,724	1,970	1,706	1,510	1,648	1,450	1,299	1,140
	8	3,360	2,614	2,144	1,822	3,100	2,442	2,021	1,727	2,116	1,780	1,540	1,810	1,547	1,356	1,522	1,323	1,174	1,030
	9	3,134	2,392	1,938	1,631	2,895	2,239	1,830	1,550	1,947	1,618	1,387	1,671	1,413	1,227	1,412	1,214	1,069	938
	10	2,933	2,201	1,764	1,472	2,713	2,064	1,668	1,401	1,800	1,480	1,259	1,551	1,298	1,118	1,316	1,121	979	860

Cone of Light

Mtg Height	Light Level	0°-180° Beam Diameter	90°-270° Beam Diameter
6 ft	33 fc	0 ft	0 ft
8 ft	19 fc	0 ft	0 ft
10 ft	12 fc	0 ft	0 ft
12 ft	8 fc	0 ft	0 ft
15 ft	5 fc	0 ft	0 ft