



PICASSO LIGHTING INDUSTRIES, LLC
320 West Commerical Ave., Moonachie, NJ 07074
201.246.8188

Indoor Distribution Test Report

Picasso Lighting Industries, LLC

320 West Commerical Ave.
Moonachie, NJ 07074

Photopia Photometric Analysis & Optical Design

Catalog Number

MUS-xR-4-D7-I3-30-80-FW-BW-W

MUSE - 4' Up/Downlight - White Housing, Frosted White Lens (Downlight), Bat Wing Lens
(Uplight)

Test Number

IES-P00370

Test Date

Fri Oct 01 15:00:28 2021

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Picasso Lighting Industries, LLC.



PICASSO LIGHTING INDUSTRIES, LLC
 320 West Commerical Ave., Moonachie, NJ 07074
 201.246.8188

MUS-xR-4-D7-I3-30-80-FW-BW-W
 MUSE - 4' Up/Downlight - White Housing, Frosted White Lens (Downlight), Bat Wing Lens
 (Uplight)
 LED (3000K 80+ CRI)



Image may differ slightly from actual unit.

Summary of Results

Output:

Watts:	40.04 W
Lumens:	4,488.33 lm
Efficiency:	N/A
Efficacy:	110.12 lm/W

Spacing Criterion


Two luminaires, plane 0°	1.24
Two luminaires, plane 90°	1.21
Four luminaires	1.34

Full Beam Angle

0° - 180°	110.66°
90° - 270°	103.48°

Calculated results may not be representative of field performance.
 Ballast factors have not been applied.

Candela Polar Plot

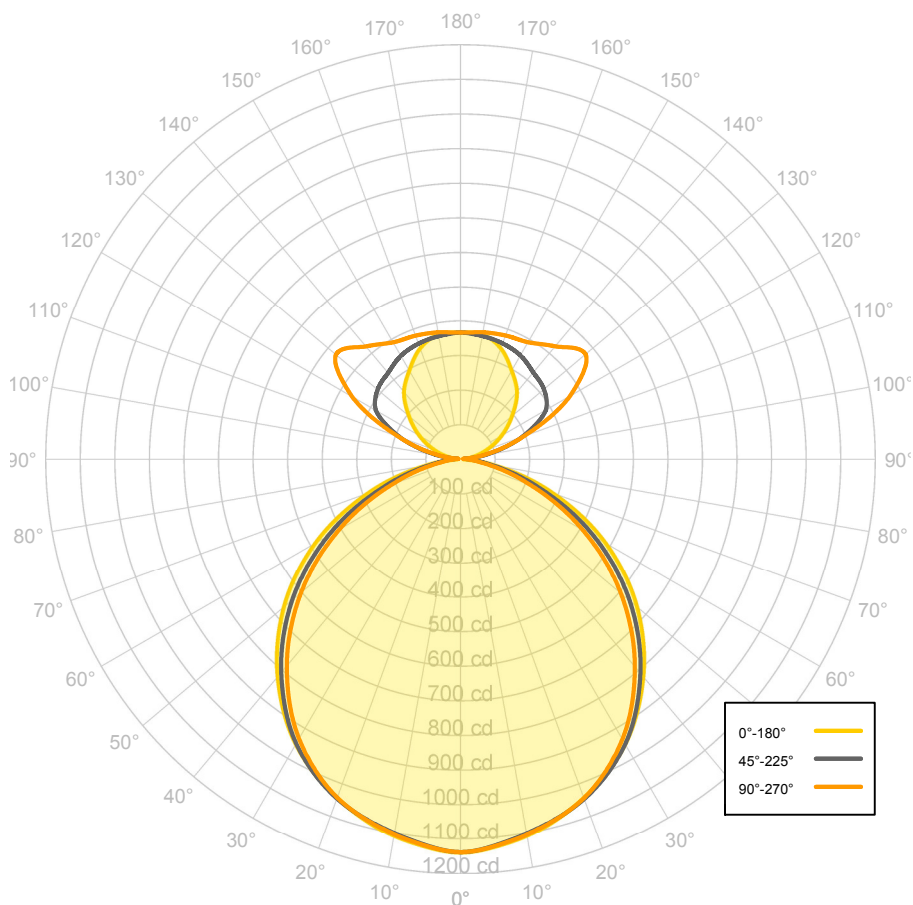

Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0° - 10°	192.34	4.29%	90° - 100°	40.88	0.91%
10° - 20°	301.23	6.71%	100° - 110°	120.41	2.68%
20° - 30°	455.99	10.16%	100° - 120°	331.51	7.39%
30° - 40°	544.17	12.12%	120° - 130°	262.55	5.85%
40° - 50°	552.28	12.30%	130° - 140°	252.49	5.63%
50° - 60°	478.60	10.66%	140° - 150°	210.41	4.69%
60° - 70°	333.94	7.44%	150° - 160°	160.13	3.57%
70° - 80°	163.40	3.64%	160° - 170°	101.11	2.25%
80° - 90°	44.73	1.00%	170° - 180°	62.56	1.39%
0° - 90°	3,066.68	68.33%	0° - 180°	4,488.33	100.00%



PICASSO LIGHTING INDUSTRIES, LLC
 320 West Commerical Ave., Moonachie, NJ 07074
 201.246.8188

Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°
0.00°	1,139.89	1,139.89	1,139.89	1,139.89	1,139.89
10.00°	1,108.49	1,106.57	1,102.53	1,106.06	1,105.67
20.00°	1,043.07	1,047.79	1,048.69	1,047.16	1,045.80
30.00°	953.08	955.76	953.99	941.58	937.54
40.00°	823.02	825.76	809.89	790.98	784.63
50.00°	666.70	665.18	638.62	615.79	605.07
60.00°	485.17	475.13	442.07	414.79	403.35
70.00°	282.91	267.98	235.48	212.02	203.61
80.00°	100.11	88.68	70.51	59.43	56.87
90.00°	9.43	10.05	9.10	6.91	6.67
100.00°	32.48	52.37	81.57	81.56	73.66
110.00°	81.23	114.73	192.29	207.89	197.99
120.00°	137.51	172.93	285.27	360.06	366.60
130.00°	194.47	226.00	314.26	420.12	471.64
140.00°	254.33	269.45	326.68	391.79	425.40
150.00°	295.84	308.38	345.70	369.92	389.99
160.00°	341.04	335.47	355.60	369.89	380.08
170.00°	367.10	357.87	361.26	364.59	372.42
180.00°	366.09	366.09	366.09	366.09	366.09

Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
0.00°	9,107	9,107	9,107
45.00°	7,775	4,635	3,926
55.00°	7,177	3,596	2,893
65.00°	6,169	2,425	1,825
75.00°	4,520	1,225	850
85.00°	2,584	374	234



Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

	pfc	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
	pcc	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%
	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
RCR	0	5,005	5,005	5,005	5,005	4,723	4,723	4,723	4,723	4,197	4,197	4,197	3,716	3,716	3,716	3,274	3,274	3,274
	1	4,588	4,393	4,219	4,062	4,324	4,155	4,002	3,863	3,707	3,591	3,485	3,297	3,210	3,130	2,918	2,855	2,796
	2	4,189	3,854	3,577	3,344	3,943	3,650	3,404	3,196	3,266	3,074	2,909	2,911	2,765	2,636	2,584	2,473	2,375
	3	3,831	3,401	3,068	2,803	3,604	3,225	2,928	2,688	2,893	2,657	2,463	2,587	2,402	2,246	2,302	2,159	2,037
	4	3,515	3,023	2,663	2,388	3,306	2,871	2,547	2,296	2,583	2,322	2,115	2,316	2,107	1,939	2,067	1,903	1,767
	5	3,236	2,707	2,337	2,063	3,045	2,574	2,238	1,988	2,323	2,049	1,839	2,089	1,867	1,693	1,871	1,693	1,551
	6	2,991	2,440	2,070	1,805	2,816	2,324	1,987	1,742	2,103	1,825	1,617	1,898	1,670	1,495	1,705	1,520	1,376
	7	2,774	2,214	1,850	1,595	2,615	2,111	1,779	1,542	1,917	1,639	1,437	1,735	1,505	1,334	1,564	1,376	1,232
	8	2,583	2,021	1,667	1,424	2,437	1,930	1,605	1,379	1,758	1,484	1,289	1,596	1,367	1,200	1,443	1,254	1,112
	9	2,413	1,855	1,513	1,282	2,280	1,774	1,459	1,243	1,621	1,353	1,165	1,476	1,250	1,088	1,339	1,151	1,012
	10	2,263	1,712	1,382	1,163	2,140	1,640	1,334	1,129	1,502	1,241	1,061	1,371	1,150	994	1,248	1,062	928

Cone of Light

Mtg Height	Light Level	0°-180° Beam Diameter	90°-270° Beam Diameter
6 ft	32 fc	17 ft	15 ft
8 ft	18 fc	23 ft	20 ft
10 ft	11 fc	29 ft	25 ft
12 ft	8 fc	35 ft	30 ft
15 ft	5 fc	43 ft	38 ft