


**SUSPENDED**

## FERNANDE SERIES

### SUSPENDED DIRECT / INDIRECT LUMINAIRE

\_\_\_\_\_  
FIXTURE TYPE



\_\_\_\_\_  
PROJECT

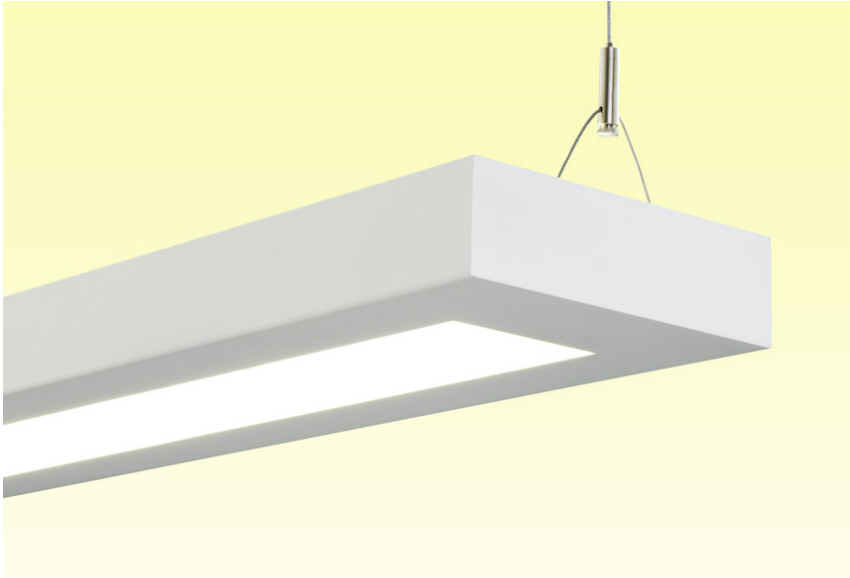

## PRODUCT FEATURES

- High efficacy ideal for projects with LEED criteria
- Suspended direct indirect fixture with clean modern lines
- One piece rigid die formed steel housing
- Opal acrylic lens or optional cross baffle downlight component
- 4' and 8' housing for continuous row mounting
- Can be specified with T5 or T8 Lamps
- 86% up/14% downlight distribution lens, 70% up/30% downlight distribution louver

## FIXTURE DETAILS

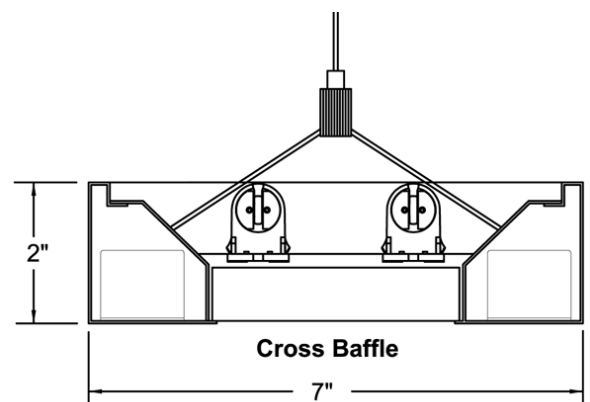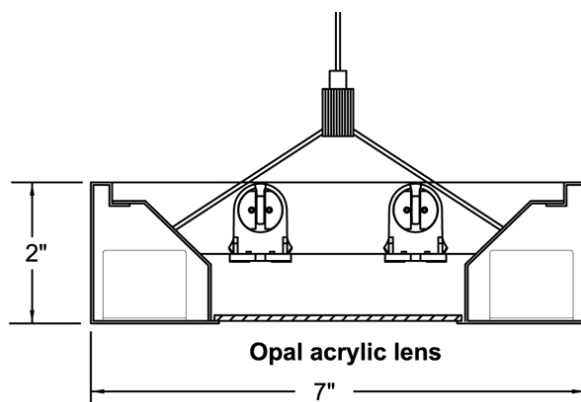

## SPECIFICATIONS

**HOUSING** Die formed 20 gauge cold rolled steel with various shielding options.

**MOUNTING** specify 48" adjustable aircraft cable or pendants.

**SHIELDING** Opal acrylic standard, cross baffle optionally available



**PICASSO LIGHTING INDUSTRIES, LLC**


46 Sellers Street, Kearny, NJ 07032 T 201.246.8188 F 201.246.8122 [www.picassoltg.com](http://www.picassoltg.com) ©2014 Picasso Lighting Industries, LLC

**FINISH** High reflectance powder coated matte white  
**BALLAST** Electronic ballast universal voltage (120V-277V)  
**LAMPS** T5 and T8 (see ordering format for lamp configurations)  
**LABELING** UL Listed, I.B.E.W. ( Local 3) made in the U.S.A  
**MEMBERS** U.S. Green Building Council, IESNA sustaining member

## PHOTOMETRICS

IES Report for Catalog Number FER-4-2 54W T5 HO-OPL, Lamps 2-54W T5 HO

IES INDOOR REPORT PHOTOMETRIC FILE NAME FER-4-254W T5-HO-ELB

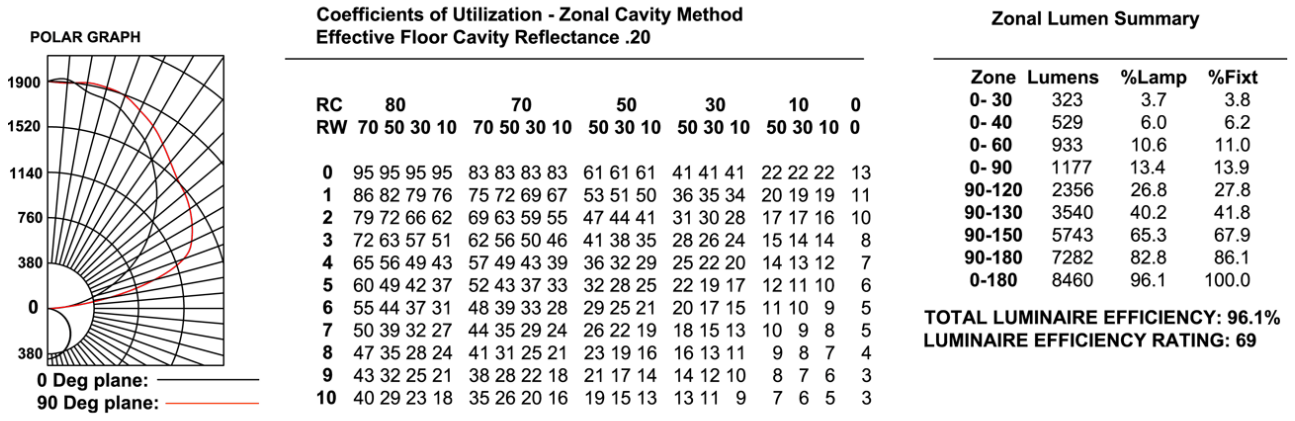

\* Visit our website [www.picassoltg.com](http://www.picassoltg.com) to download IES files and Photometric Reports.

\* Please consult with Picasso Lighting for application layouts.

## ORDERING FORMAT

SERIES	SIZE	LAMPING	MOUNTING	BALLAST	VOLTAGE	OPTIONS
<b>Fernande</b>	<b>4:4'</b>	1-28W T5 1-32W T8 1-54W T5HO 2-28W T5 2-32W T8 2-54W T5HO	<b>AC:</b> Aircraft cable kit <b>PK:</b> Pendant kit	<b>ELB:</b> Electronic <b>ELB/DIM:</b> Dimming-Specify type and voltage	<b>UE:</b> 120V-277V	<b>CB:</b> Cross Baffle <b>CC:</b> Custom Colors <b>DC:</b> Dust Cover <b>DEC:</b> Decorative End Cap <b>EM:</b> Emergency Battery-Specify Voltage <b>LPI:</b> Lamps supplied by others/installed by Picasso <b>PTW:</b> Plug Thru Wiring <b>SC:</b> Separate Circuit
	<b>8:8'</b>	1-28W T5 1-32W T8 1-54W T5HO 2-28W T5 2-32W T8 2-54W T5HO				

YOUR ORDER

FER

Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.



**PICASSO LIGHTING INDUSTRIES, LLC**

46 Sellers Street, Kearny, NJ 07032 T 201.246.8188 F 201.246.8122 [www.picassoltg.com](http://www.picassoltg.com) ©2014 Picasso Lighting Industries, LLC