

Gaitri Knife-Edge

COVE

TYPE
PROJECT

Overview

- Unobtrusive, evenly illuminated cove lighting is hung on wall with mounting brackets and covered with drywall creating a cove
- Provided in one piece lengths up to 12 feet
- Corners are available in any angle
- Field adjustable light distribution with a thumb screw for even illumination



Ordering Format

PART NUMBER: GAI-C

Size	Lumens Direct	Lumens Indirect	CCT Available	CRI Available
2 = 2 Feet		I3 = 350 LPF	27 = 2700 Kelvins	80 = 80-85 CRI
4 = 4 Feet		I5 = 500 LPF	30 = 3000 Kelvins	90 = 90-95 CRI
6 = 6 Feet		I7 = 750 LPF	35 = 3500 Kelvins	
8 = 8 Feet		I10 = 1000 LPF	40 = 4000 Kelvins	
10 = 10 Feet			TW = Tunable White 2700-5000 Kelvins	
12 = 12 Feet				
CL = Custom Length, add in notes				
Optics	Mounting	Driver / Voltage	Color	Options
CL = Clear	BM = Bracket Mount	ND 1 = Non-Dim Universal 120VAC ND 2 = Non-Dim Universal 277VAC ZT 1 = 0-10v dimming 120v dual 1% ZT 2 = 0-10v dimming 277v dual 1% CC = Custom Control - Add in notes LE1 = Lutron EcoSystem 1% DLC EE CCR / PWM SoftOnFadeToBlack LE5 = Lutron EcoSystem 5% DLC EE CCR	W = Standard White	EMD = Emergency Driver - Battery Backup 120-277VAC

NOTES

ORDER NUMBER:

Gaitri Knife-Edge COVE

TYPE

PROJECT

Construction & Mounting

HOUSING

Knife-edge extruded aluminum in whole foot increments up to 12 ft. in one piece. Internal components are die-formed aluminum. Corners are mitered. Continuous wall-mounting bracket with feed access simplifies fixture installation. A mounting rail is installed along the desired wall and housing is then hung on rail, easy installation. Linear fixture is hung and covered in sheetrock creating a cove.

REFLECTOR

Integral powder-coated LED housing with excessive reflectivity for increased lumen output

FINISH


Standard powder-coated colors are white. Troffer style fixtures are not limited to white, consult factory for special applications.

OPTICS

Clear acrylic diffuser is used to protect LED linear strip.

MOUNTING

Continuous wall-mounting bracket with feed access simplifies fixture installation. Units may be continuously rowed. Quick-connect hardware provided. Splicing hardware provided at fixture joints. Linear fixture is then covered in sheetrock creating a cove.

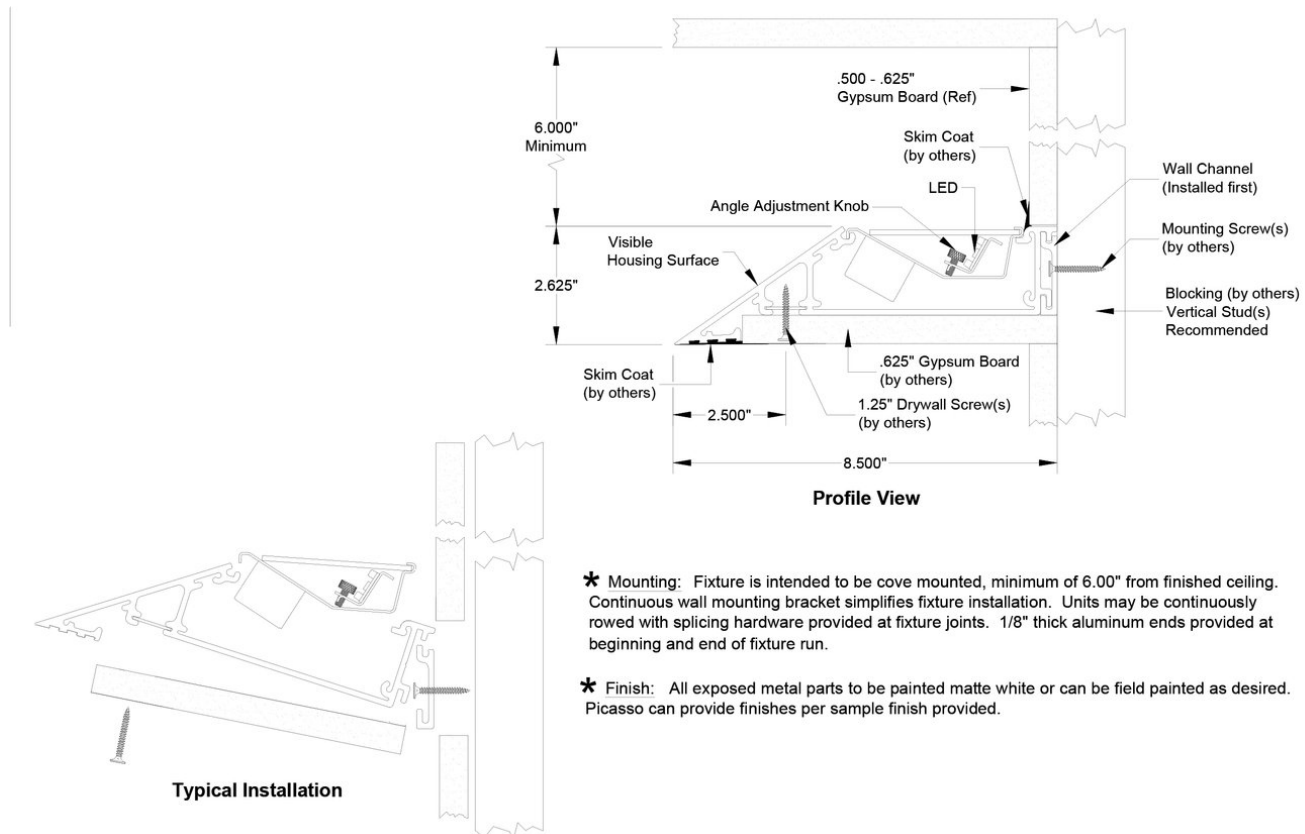

* **Mounting:** Fixture is intended to be cove mounted, minimum of 6.00" from finished ceiling. Continuous wall mounting bracket simplifies fixture installation. Units may be continuously rowed with splicing hardware provided at fixture joints. 1/8" thick aluminum ends provided at beginning and end of fixture run.

* **Finish:** All exposed metal parts to be painted matte white or can be field painted as desired. Picasso can provide finishes per sample finish provided.

Electrical / Driver

- Drivers - Our drivers are specifically selected based on fixture application to ensure ultimate reliability and long life. We use only UL recognized brands of LED drivers. Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming. Please note, 277v has longer distances from power feed to power feed then 120v.
- If required, we can supply premium drivers such as Lutron, Eidoled and others upon request. Advanced control systems compliant drivers such as POE, DALI, DMX, etc. are also available, please consult factory.
- Rated life (90% survivorship) of 50,000 hours at 50° C max. ambient (and 70° C max. case) temperature. At maximum driver load: Efficiency >84%, PF>0.9, THD
- POE - We are working with Igor POE systems to either add a node into our fixtures or remote them. Based on the fixture you select, we will notify you (or you can contact the factory) to see if we can install the node or the node needs to be remote. Just add POE1 in the spec and we will advise. Please keep in mind you need to specify a complete POE control system before specifying POE1.
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming.
- Emergency drivers are factory installed, long life, high temperature, recyclable Ni-Cad battery pack with test switch and charge indicator. EMR is minimum of 90 minutes operation to meet code.
- Whip - Six feet long, wiring RHOS/Reach Compliant, 18 gauge, 600v rated, Supplied, wired to the fixture, unless otherwise noted.

LED Performance

LED Output	CCT Color Temp	Watts	Lumens	Lumens per Watt	CCT Multiplier
Low (indirect)	3000	3.0 WPF	350 LPF	118 LPW	2700 = .95
Medium (indirect)	3000	4.3 WPF	500 LPF	117 LPW	3000 = 1
High (indirect)	3000	6.55 WPF	750 LPF	116 LPW	3500 = 1.01
Very High (indirect)	3000	8.8 WPF	1000 LPF	115 LPW	4000 = 1.03

- The table above is a quick reference. When calculating loads make sure you add direct and indirect LPW to get total wattage. Please refer to photometric report for detailed information.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Our standard LED's CCT (correlated color temperature) range is 2700K to 4000K. Other CCT values are available upon request.
- We log LED bin codes for each project we supply to ensure color consistency and keep a record of those projects for future reference.
- CRI offered is 80+, and 90+ Note: on 90+ CRI use .85 multiplier
- Tunable white, warm dim and other special LED colors available.
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation.
- Light engines are easily replaced.
- We use only recognized brand LED's with 3 SDCM (standard deviation color matching) with high color consistency. 2 SDCM available upon request.
- LRP - "LED Reel Program" – LED's for printed circuit boards come on reels' like old 8mm projectors and they're sold in lots just like fabric. At Picasso Lighting, we have a program where we make sure all of your reels come from the same lot for each project. This ensures excellent color consistency in large open spaces.
- LED life is rated at 50,000 hours
- Custom Lumens Available

Certifications & Warranties

- Limited five-year (50,000 hours) warranty on all products.
- I.C. rated fixtures are available upon request.
- Chicago Plenum products are available upon request.
- Made in the U.S.A.
- UL and CUL listed for dry and damp locations.
- DLC® is a non-profit organization whose mission is to drive efficient lighting by defining quality, facilitating thought leadership, and delivering tools and resources to the lighting market through open dialogue and collaboration. We are currently getting our products listed with DLC. Products listed, will have DLC Logo.
- All fixtures are IBEW manufactured and assembled.



Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the

Gaitri Knife-Edge

COVE

TYPE

PROJECT

product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.