

# Truss Mini Regress Lens


## PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

### Overview

- in-dus-tri-al /in'destreal/ adjective; relating to or characterized by industry.
- Truss/tres/ noun; a framework, typically consisting of rafters, posts, and struts, supporting a roof, bridge, or other structure.
- Truss Series was designed to recreate an industrial looking truss.
- DESIGNER SELECTIONS
- Truss Series has 2 profile sizes , Standard is three and one quarter width and six inches in height. Mini truss is three and one quarter inches in width and four and three quarters inches in height.
- Truss Series has 2 options for LED sources: They are, linear, slightly regressed lens , and downlight version.
- Truss Series has multiple choices for canopies and colors, just scroll down for your choices.
- Truss Series is available in almost any CCT available in the market, we've selected the most popular , but don't let that stop you from asking for something different.
- Truss Series is available in direct only and direct/indirect for both liners lens and downlight in standard and mini. We can also tune in our drivers to specific lumen output if required.
- Truss Series is always available for your projects special customization needs, just contact your local agent.
- Truss Series qualifies as "Made in America" and is part of our ECO sustainable end of life program.
- For all: ies files, pictures, instructions, rfa files, and warranties...scroll to bottom.
- Please be advised that our Truss Series is available in Surface, Pendant and Wall.

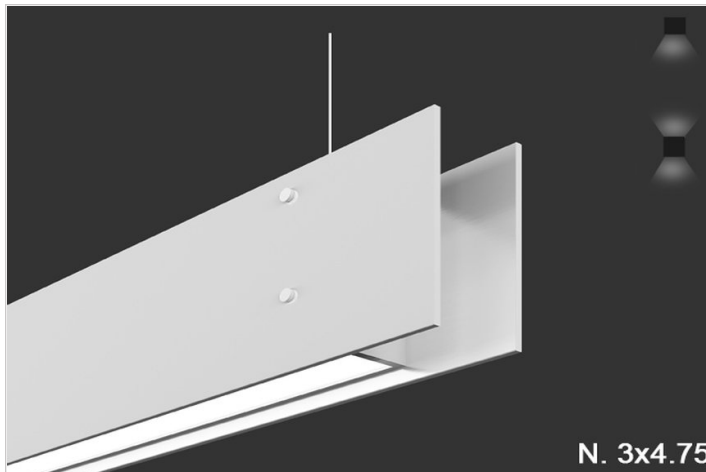

# Truss Mini Regress Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE  
PROJECT

## Ordering Format

PART NUMBER: TMI-PR

Size	Lumens Direct	Lumens Indirect	CCT Available	CRI Available
4 = 4 Feet	D3 = 350 LPF	I3 = 350 LPF	27 = 2700 Kelvins	80 = 80-85 CRI
6 = 6 Feet	D5 = 500 LPF	I5 = 500 LPF	30 = 3000 Kelvins	90 = 90-95 CRI
8 = 8 Feet	D7 = 750 LPF	I7 = 750 LPF	35 = 3500 Kelvins	
12 = 12 Feet	D10 = 1000 LPF	I10 = 1000 LPF	40 = 4000 Kelvins	
	NN = Not Needed	NN = Not Needed	TW = Tunable White 2700-5000 Kelvins	
	TW = Tunable White-27k-56k/0-10v Control	TW = Tunable White-27k-56k/0-10v Control		
Direct Optics	Mounting	Driver / Voltage	Fixture Finish	Canopy/Power Cord Color
OW = Opal White (direct only) BW = Batwing upright only OW/MC = D-Opal White / I-Matte Clear OW/BW = D-Opal White/ I-BATWING	AC1R = Round 5in Canopy JBox - 5in Support AC1S = Square 5in Canopy JBox - 5in Support ACD1R = Round 5in Canopy JBox - 2in Support Slot Grid ACD1S = Square 5in Canopy JBox - 2in Support Slot Grid ACD2R = Round 5in Canopy JBox - 2in Support T Grid ACD2S = Square 5in Canopy JBox - 2in Support T Grid ACUR = Round 5in Canopy JBox - .5in Support Unistrut ACUS = Square 5in Canopy JBox - .5in Support Unistrut ACRR = Round 5in Canopy JBox - 2in Support 1/4 Rod ACRS = Square 5in Canopy JBox - 2in Support 1/4 Rod	ND 1 = Non-Dim Universal 120VAC ND 2 = Non-Dim Universal 277VAC ZT 1 = 0-10v dimming 120v dual 1% ZT 2 = 0-10v dimming 277v dual 1% CC = Custom Control - Add in notes LE1 = Lutron EcoSystem 1% DLC EE CCR / PWM SoftOnFadeToBlack	W = Standard White BK = Standard Black SVR = Standard Silver RAL = Enter RAL# or Pantone# in notes PA = Plated Aluminum-enter plated finish in notes CW = Standard Wood Finish - see wood PN # enter in notes. SW = Special pattern submitted by designer AA = Anodized Aluminum -enter PN in notes section	CWPW = Canopy White/Power Cord White CWPB = Canopy White/Power Cord Black CBPB = Canopy Black/Power Cord Black CBPW = Canopy Black/Power Cord White
Options				
AWN = Lutron Athena Wireless Node (RF only) AWNS = Lutron Athena Wireless Node (with Sensor) 2C = 2 circuit wiring for direct indirect IW = Inverter Wiring OS = Occupancy Sensor CA = Custom Angle, add in notes				

# Truss Mini Regress Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE  
PROJECT

EMD = Emergency  
Driver - Battery Backup  
120-277VAC

NOTES

ORDER NUMBER:

# Truss Mini Regress Lens

## PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

### Construction & Mounting

#### HOUSING

Mini version side panels and end details are 1/4" x 4.75" thick extruded aluminum and are supplied in nominal lengths of 4 ft., 6 ft., 8 ft. and 12 ft. Side panels are secured with decorative thumb screws. Side panels do not need to be removed during installation or for maintenance. Fixtures may be continuously rowed (contact factory for details). Internal components are constructed from min. 20 gauge die-formed steel. Easy access to driver and LED boards. Custom sizes are available.

#### REFLECTOR

Integral powder-coated LED housings with excessive reflectivity for increased lumen output is built into our luminaires

#### FINISH


Standard powder-coated colors are white, black and silver. Custom processed wood finishes, aluminum anodized finishes, chrome/gold plating and custom finishes are available as well. We also accept RAL and Pantone numbers for powder-coating color choices.

#### OPTICS

Direct component provided with a soft white acrylic lens formulated for LED light sources. Lens lifts out for maintenance. Indirect LED strips are mounted in an extruded aluminum channel with an integral clear acrylic dust cover.

#### MOUNTING

Cable mounting with various size canopies and power feeds. If not selected in options, canopy color and cord will be white. Cable uses gripper style locking for field adjustments, 48" standard. Canopy mounts to standard J-box. Can also be stem mounted. See options for more information.

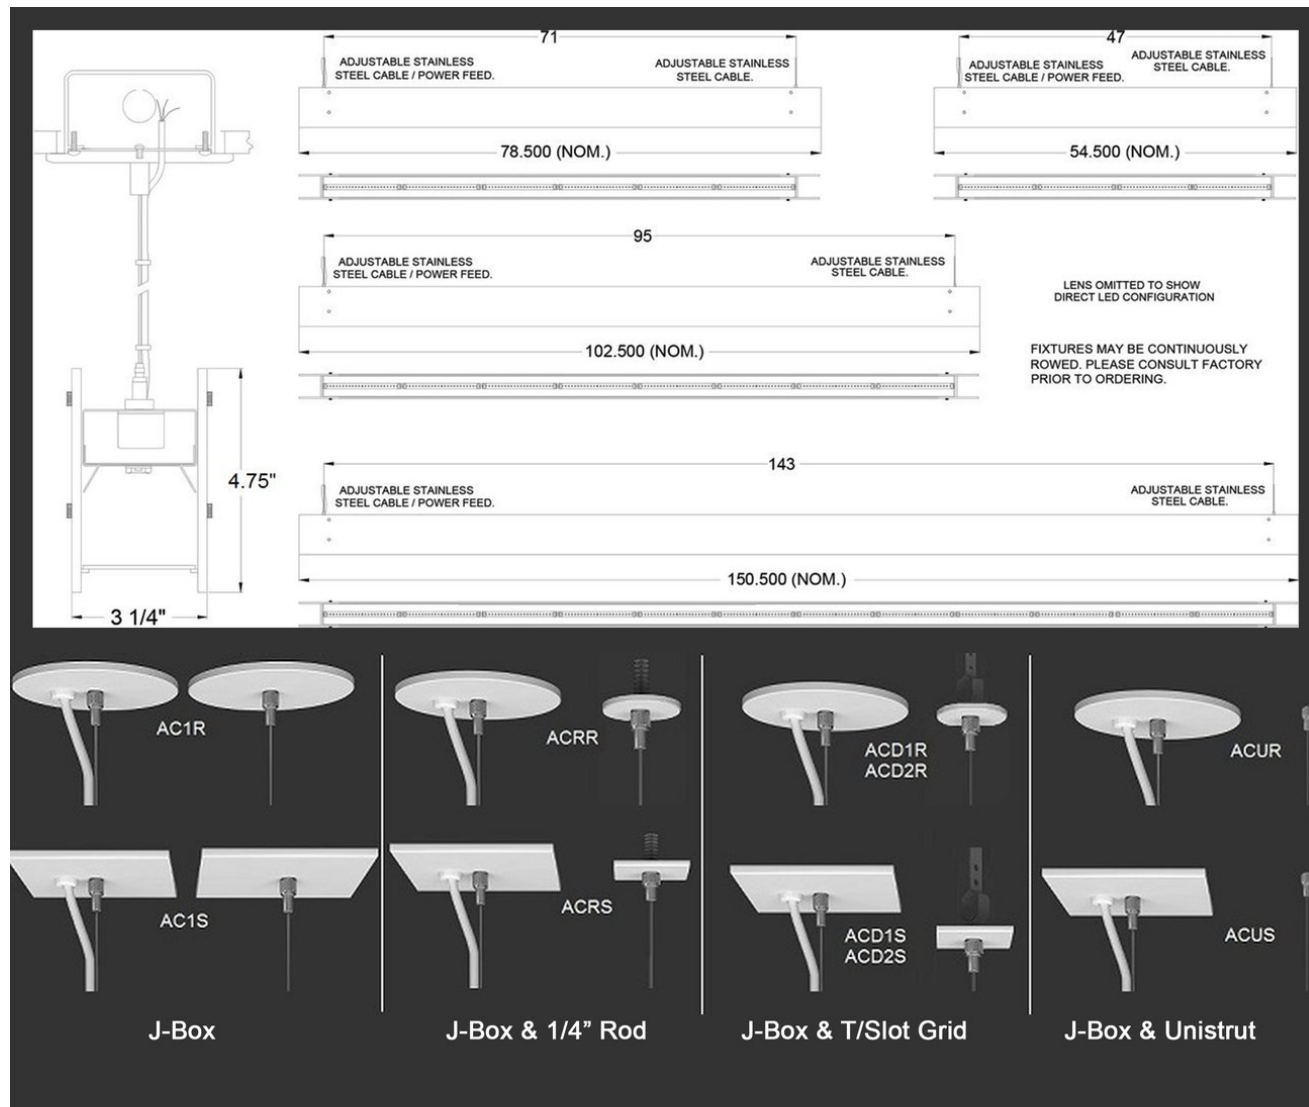


# Truss Mini Regress Lens

PENDANT LARGE (INTEGRAL DRIVERS)


TYPE

PROJECT


### Standard Finishes



White  
W




Black  
BK




Silver  
SVR

### Anodized Aluminum


xxxx-B for Aluminum to be Brushed




Anodized Black  
AABK




Anodized  
DK. Bronze  
AADB




Anodized  
LT. Bronze  
AALB



Anodized  
Champagne  
AALC




Anodized Clear  
AACL




**Custom RAL** - Custom finishes go to: [tiger-coatings.com](http://tiger-coatings.com) **Add # in Notes**

Standard Finishes – colors are powder coated and do not add to delivery lead time.  
 Anodized Aluminum – can be smooth or brushed, color can vary fixture to fixture and adds 2-3 weeks to lead time. Anodized finish is limited in fixture size.  
 Plated Aluminum – is a mirror finish in chrome and gold and adds 2 weeks to lead time.  
 Wood Finishes – so realistic, wood finish can add up to 3-4 weeks to lead time.


### Plated Aluminum




Antique  
Brass  
APAB



Aged  
Bronze  
APBZ




Polished  
Chrome  
APPC




Polished  
Gold  
APPG


### Wood Finishes




Light Bamboo  
LW01




Light Pine  
LW02




Teak  
LW03




Dark Bamboo  
LW04




Dark Cherry  
LW05




Brushed Chestnut  
LW06




Chestnut  
DW01




Dark Chestnut  
DW02




Cherry  
DW03




Dark Mahogany  
DW04




Mahogany  
DW05



Walnut Pine  
DW06



Dark Walnut Oak  
DW07



Consult Factory

# Truss Mini Regress Lens

## PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

### Electrical / Driver

- Drivers - Our drivers are specifically selected based on fixture application to ensure ultimate reliability and long life. We use only UL recognized brands of LED drivers. Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming. Please note, 277v has longer distances from power feed to power feed than 120v.
- If required, we can supply premium drivers such as Lutron, Eldoed and others upon request. Advanced control systems compliant drivers such as POE, DALI, DMX, etc. are also available, please consult factory.
- Rated life (90% survivorship) of 50,000 hours at 50° C max. ambient (and 70° C max. case) temperature. At maximum driver load: Efficiency >84%, PF>0.9, THD
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming.
- Emergency drivers are factory installed as an option, long life, high temperature, recyclable Ni-Cad battery pack with test switch and charge indicator. EMR is minimum of 90 minutes operation to meet code.
- POE - We are working with Molex/Igor POE systems. We can add a POE driver into our fixtures or remote them. Based on the fixture you select, we will notify you (or you can contact the factory) to see if we can install the P-driver or the P-driver needs to be remote. Just add POE1 in the spec and we will advise. Please keep in mind you need to specify a complete POE control system before specifying POE1.

### LED Performance

LED Output	CCT Color Temp	Watts	Lumens	Lumens per Watt	CCT Multiplier
Low	3000	4.3 WPF Direct (3.4 WPF Indirect)	350 LPF	82	2700 = .95
Medium	3000	6.25 WPF Direct (4.8 WPF Indirect)	500 LPF	81	3000 = 1
High	3000	9.43 WPF Direct (7.3 WPF Indirect)	750 LPF	80	3500 = 1.01
Very High	3000	12.7 WPF Direct (9.7 WPF Indirect)	1000 LPF	79	4000 = 1.03

- The table above is a quick reference. When calculating loads make sure you add direct and indirect LPW to get total wattage. Please refer to photometric report for detailed information.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Our standard LED's CCT (correlated color temperature) range is 2700K to 4000K. Other CCT values are available upon request.
- We log LED bin codes for each project we supply to ensure color consistency and keep a record of those projects for future reference.
- CRI offered is 80+, and 90+ Note: on 90+ CRI use .85 multiplier
- Tunable white, warm dim and other special LED colors available.
- Custom Lumens Available
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation.
- Light engines are easily replaced.
- We use only recognized brand LED's with 3 SDCM (standard deviation color matching) with high color consistency. 2 SDCM available upon request.
- If you require a special LED manufacturer, please contact us. LED chip manufacturers used by Picasso are primarily (but not limited to) Nichia, Cree and Samsung.
- LRP - "LED Reel Program" – LED's for printed circuit boards come on reels' like old 8mm projectors and they're sold in lots just like fabric. At Picasso Lighting, we have a program where we make sure all of your reels come from the same lot for each project. This ensures excellent color consistency in large open spaces.
- LED life is rated at 50,000 hours

### Certifications & Warranties

- Limited five-year (50,000 hours) warranty on all products. Limited ten-year (100,000 hours) warranty on all Lutron drivers.
- DLC listed products will have DLC Logo.
- Chicago Plenum and IC products are available upon request.
- Warranty does not cover damage caused by transport, damage caused by using the fixture in an area it is not UL rated for, damage caused by negligence, lack of maintenance, attempts to repair by unqualified or unauthorized personnel, by using non-original accessories/parts, fixtures installed in systems without power surge protection.
- UL and CUL listed for dry and damp locations.
- IBEW USA Union All fixtures are IBEW manufactured and assembled in the USA.
- We manufacture based on approved spec sheets and submittals signed by professionals responsible. Change orders must be in writing and will delay delivery.
- Picasso Lighting must receive in writing any thought to be defective products discovered, no later than 4 weeks from delivery to; [ttoledo@picassoltg.com](mailto:ttoledo@picassoltg.com). Picasso Lighting will send a field technician to the site to evaluate the said defective product. We do accept field repair from licensed electrical contractors but not without a written agreement signed by Picasso Lighting official. Failure to adhere to all warranty and certifications will void any recompense and the warranty.



# Truss Mini Regress Lens

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.