

Truss Downlight


PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Overview

- in·dus·tri·al /in'destreal/ adjective; relating to or characterized by industry.
- Truss/tres/ noun; a framework, typically consisting of rafters, posts, and struts, supporting a roof, bridge, or other structure.
- Truss Series was designed to recreate an industrial looking truss.
- DESIGNER SELECTIONS
- Truss Series has 2 profile sizes , Standard is three and one quarter width and six inches in height. Mini truss is three and one quarter inches in width and four and three quarters inches in height.
- Truss Series has 2 options for LED sources: They are, linear, slightly regressed lens , and downlight version.
- Truss Series has multiple choices for canopies and colors, just scroll down for your choices.
- Truss Series is available in almost any CCT available in the market, we've selected the most popular , but don't let that stop you from asking for something different.
- Truss Series is available in direct only and direct/indirect for both liners lens and downlight in standard and mini. We can also tune in our drivers to specific lumen output if required.
- Truss Series is always available for your projects special customization needs, just contact your local agent.
- Truss Series qualifies as "Made in America" and is part of our ECO sustainable end of life program.
- For all: ies files, pictures, instructions, rfa files, and warranties...scroll to bottom.
- Please be advised that our Truss Series is available in Surface, Pendant and Wall.

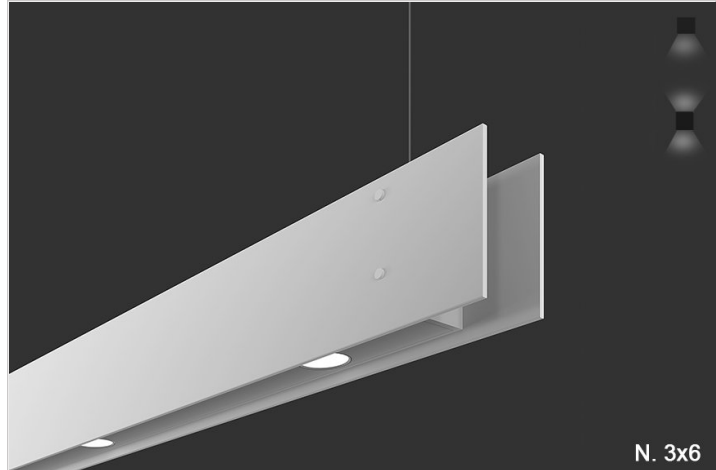

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Ordering Format

PART NUMBER: TRUD-PQ

Size	Lumens Direct	Lumens Indirect	CCT Available	CRI Available
4 = 4 Feet / 3 downlights	Q132 = Downlight 1350 Lumens 20 Degree	I3 = 350 LPF	27 = 2700 Kelvins	80 = 80-85 CRI
6 = 6 Feet / 4 downlights	Q123 = Downlight 1250 Lumens 30Degree	I5 = 500 LPF	30 = 3000 Kelvins	90 = 90-95 CRI
8 = 8 Feet/ 6 downlights		I7 = 750 LPF	35 = 3500 Kelvins	
12 = 12 Feet/ 9 downlights		I10 = 1000 LPF	40 = 4000 Kelvins	
CL = Custom Length or # of downlights , add in notes (1 inch increment standard)		NN = Not Needed	TW = Tunable White 2700-5000 Kelvins	
Direct Optics	Indirect Optics	Mounting	Driver / Voltage	Fixture Finish
SR = Specular Reflector Downlight	ILW = Lambertian White Lens IBW120 = Batwing 120 Degree Beam IF150 = Flat 150 Degree Beam IA6040 = Asymmetric 60 Degree Beam @40 Degree Tilt IA4560 = Asymmetric 45 Degree Beam @60 Degree Tilt NN = Not Needed	AC1R = Round 5in Canopy JBox - 5in Support AC1S = Square 5in Canopy JBox - 5in Support ACD1R = Round 5in Canopy JBox - 2in Support Slot Grid ACD1S = Square 5in Canopy JBox - 2in Support Slot Grid ACD2R = Round 5in Canopy JBox - 2in Support T Grid ACD2S = Square 5in Canopy JBox - 2in Support T Grid ACUR = Round 5in Canopy JBox - .5in Support Unistrut ACUS = Square 5in Canopy JBox - .5in Support Unistrut ACRR = Round 5in Canopy JBox - 2in Support 1/4 Rod ACRS = Square 5in Canopy JBox - 2in Support 1/4 Rod	ND 1 = Non-Dim Universal 120VAC ND 2 = Non-Dim Universal 277VAC ZT 1 = 0-10v dimming 120v dual 1% ZT 2 = 0-10v dimming 277v dual 1% CC = Custom Control - add in notes LE1 = Lutron EcoSystem 1% DLC EE CCR/PWM SoftOnFadeToBlack POE1 = POE-Igor Node	W = Standard White BK = Standard Black SVR = Standard Silver RAL = Enter RAL # in notes section DW/LW = Plated Aluminum-enter plated finish in notes CW = Standard Wood Finish - see wood PN # enter in notes. SW = Special pattern submitted by designer AA = Anodized Aluminum -enter PN in notes section
Canopy/Power Cord Color	Options			
CWPW = Canopy White/Power Cord White	AWN = Lutron Athena Wireless Node (RF only)			
CWPB = Canopy White/Power Cord Black	AWNS = Lutron Athena Wireless Node (with Sensor)			
CBPB = Canopy Black/Power Cord Black	2C = 2 circuit wiring for downlight selection			
CBPW = Canopy Black/Power Cord White	OS = Occupancy Sensor			
	EMD = Emergency			

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE
PROJECT

	Driver - Battery Backup 120-277VAC IW = Inverter Wiring CA = Custom Angle, add in notes
--	---

NOTES

ORDER NUMBER:

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Construction & Mounting

HOUSING

Side panels and end details are 1/4" x 6" thick extruded aluminum and are supplied in nominal lengths of 4 ft., 6 ft., 8 ft. and 12 ft. Side panels are secured with decorative thumb screws. Side panels do not need to be removed during installation or for maintenance. Fixtures may be continuously rowed (contact factory for details). Internal components are constructed from min. 20 gauge die-formed steel. Easy access to driver and LED boards. Custom sizes are available.

REFLECTOR

Integral powder-coated LED housings with excessive reflectivity for increased lumen output is built into our luminaires

FINISH


Standard powder-coated colors are white, black and silver. Custom processed wood finishes, aluminum anodized finishes, chrome/gold plating and custom finishes are available as well. We also accept RAL and Pantone numbers for powder-coating color choices.

OPTICS

Direct component are our factory made downlights ic various beam spreads. Indirect LED strips are mounted in an extruded aluminum channel with an integral clear acrylic dust cover.

MOUNTING

Cable mounting with various size canopies and power feeds. If not selected in options, canopy color and cord will be white. Cable uses gripper style locking for field adjustments 48" standard. Canopy mounts to standard J-box. See options for more information.

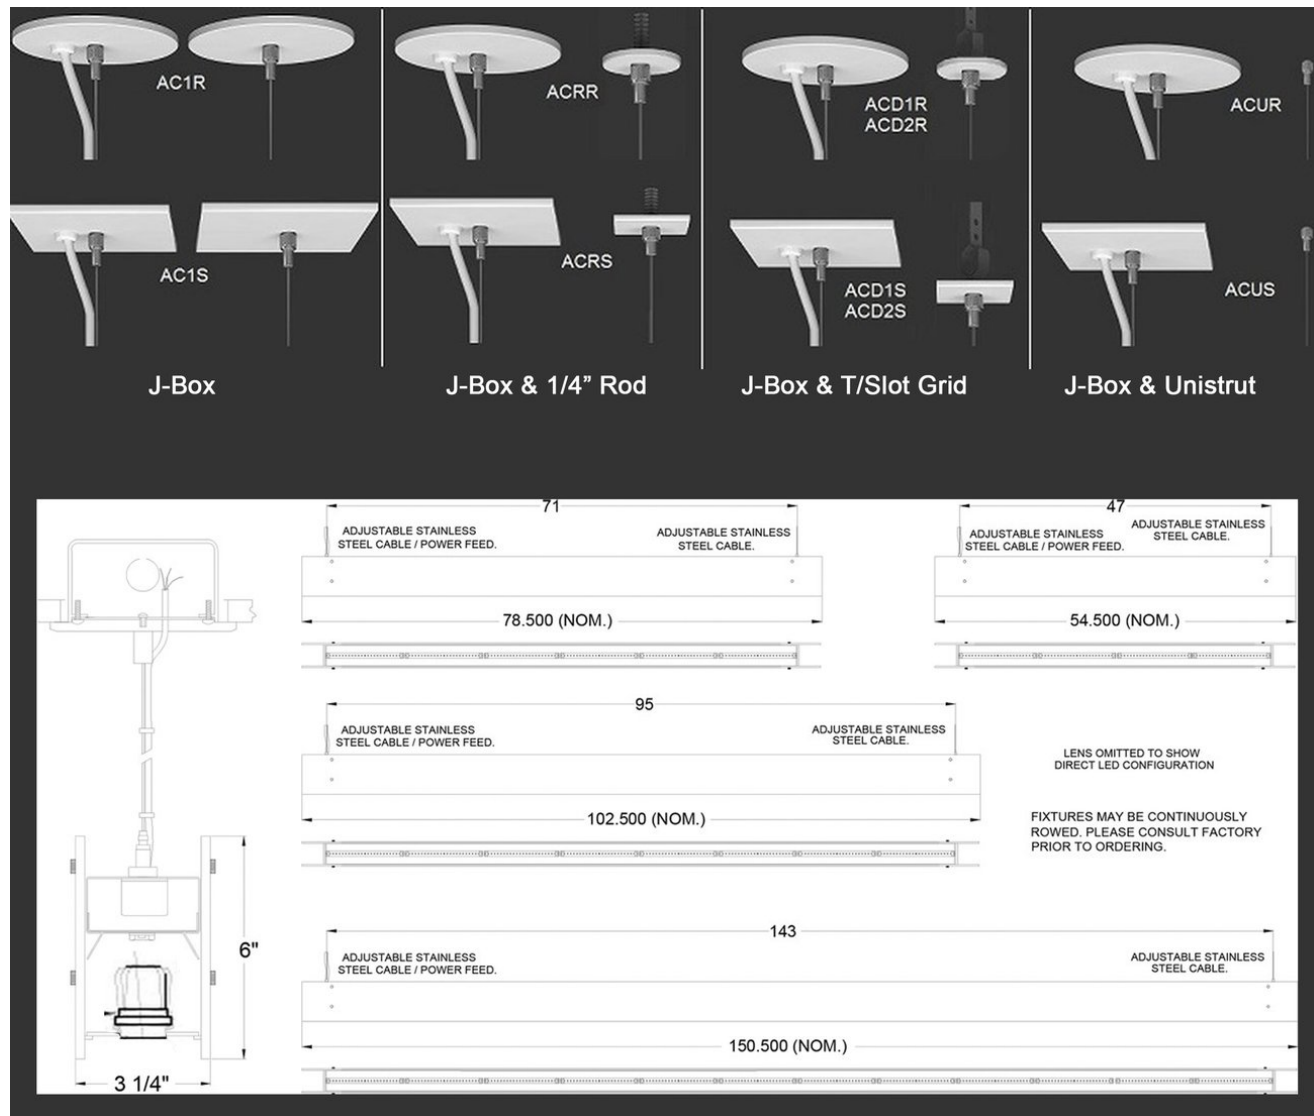


Truss Downlight


PENDANT LARGE (INTEGRAL DRIVERS)

TYPE


PROJECT




IBW120




ILW



IF150




IA6040




IA4560


Standard Finishes



White
W




Black
B




Silver
SVR

Anodized Aluminum - Premium Finishes


xxxx-B for Aluminum to be Brushed




Anodized Black
AABK




Anodized DK.
Bronze
AADB



Anodized LT.
Bronze
AALB




Anodized
Champagne
AALC




Anodized Clear
AACL


Custom RAL - Custom finishes go to: tiger-coatings.com **Add # to Notes**




Plated Aluminum - Premium Finishes



Antique Brass
PAAB




Polished Chrome
PAPC




Polished Gold
PAPG


Wood - Premium Finishes




LW01




LW02




LW03




LW04




LW07




LW08




DW02




DW07




DW08




DW09




DW10



DW11



DW12



Consult Factory

Standard and Custom RAL Finishes - colors are powder coated and do not add to delivery lead time. Maximum length is 12ft.

Anodized Aluminum - can be smooth or brushed, color can vary fixture to fixture and adds 4-5 weeks to lead time. Anodized finish is limited in fixture size. Maximum length is 12ft.

Plated Aluminum - is a mirror finish in chrome and gold and adds 4-5 weeks to lead time. Maximum length is 8ft.

Wood Finishes - so realistic, wood finish can add up to 4-5 weeks to lead time. Maximum length is 10ft.

Electrical / Driver

- Drivers - Our drivers are specifically selected based on fixture application to ensure ultimate reliability and long life. We use only UL recognized brands of LED drivers. Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming. Please note, 277v has longer distances from power feed to power feed then 120v.
- If required, we can supply premium drivers such as Lutron, Eldoed and others upon request. Advanced control systems compliant drivers such as POE,DALI, DMX, etc. are also available, please consult factory.
- Rated life (90% survivorship) of 50,000 hours at 50° C max. ambient (and 70° C max. case) temperature. At maximum driver load: Efficiency >84%, PF>0.9, THD
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming.
- Emergency drivers are factory installed as an option, long life, high temperature, recyclable Ni-Cad battery pack with test switch and charge indicator. EMR is minimum of 90 minutes operation to meet code.
- POE - We are working with Molex/Igor POE systems. We can add a POE driver into our fixtures or remote them. Based on the fixture you select, we will notify you (or you can contact the factory) to see if we can install the P-driver or the P-driver needs to be remote. Just add POE1 in the spec and we will advise. Please keep in mind you need to specify a complete POE control system before specifying POE1.

LED Performance

LED Output	CCT Color Temp	Watts	Lumens	Lumens per Watt	CCT Multiplier
Medium 20d	3000	12.71 TW	1360 TL	107	2700=.95
Medium 30d	3000	12.71 TW	1250 TL	107	3000 = 1
Low	3000	3.4 WPF Indirect	350 LPF	82	2700=.95
Medium	3000	4.8 WPF Indirect	500 LPF	81	3000=1.00
High	3000	7.3 WPF Indirect	750 LPF	80	3500= 1.01
Very High	3000	9.7 WPF Indirect	1000 LPF	79	4000 = 1.03

- The table above is a quick reference. When calculating loads make sure you add direct and indirect LPW to get total wattage. Please refer to photometric report for detailed information.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Our standard LED's CCT (correlated color temperature) range is 2700K to 4000K. Other CCT values are available upon request.
- We log LED bin codes for each project we supply to ensure color consistency and keep a record of those projects for future reference.
- CRI offered is 80+, and 90+ Note: on 90+ CRI use .85 multiplier
- Tunable white, warm dim and other special LED colors available.
- Custom Lumens Available
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation. As well as our downlights.
- Light engines are easily replaced.
- We use only recognized brand LED's with 3 SDCM (standard deviation color matching) with high color consistency. 2 SDCM available upon request.
- If you require a special LED manufacturer, please contact us. LED chip manufacturers used by Picasso are primarily (but not limited to) Nichia, Cree and Samsung.
- LRP - "LED Reel Program" – LED's for printed circuit boards come on reels' like old 8mm projectors and they're sold in lots just like fabric. At Picasso Lighting, we have a program where we make sure all of your reels come from the same lot for each project. This ensures excellent color consistency in large open spaces.
- LED life is rated at 50,000 hours

Certifications & Warranties

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

- Limited five-year limited warranty on all products that are installed according to the product's specifications. Fixture must be properly installed by qualified licensed electricians, who meet and understand local installation requirements. Proper ambient conditions are to be met. The normal indoor temperatures of 50-90 degrees F, no more than 95% RH and sufficient air flow are required. Fixture should not be modified, and no maintenance or repairs should be performed without the written authorization from Picasso Lighting.
- We manufacture based on approved spec sheets and submittals signed by the customers. Change orders must be in writing and will delay delivery.
- Picasso Lighting reserves the right to repair or replace a defective product with another product with a similar design and the same or better performance, or to refund the distributor for the purchase price. The costs of labor to replace luminaires are not covered.
- Warranty does not cover damage caused by transportation, damage caused by using the fixture in an area it is not UL rated for, damage caused by negligence, lack of maintenance, attempts to repair by unqualified or unauthorized personnel, by using non-original accessories/parts, fixtures installed in systems without power surge protection.
- Picasso Lighting must receive in writing any complaints regarding the defective products, no later than 3 weeks from delivery addressed to: ttoledo@picassoltg.com. Picasso Lighting will send a field technician to the site to evaluate the said defective product or may require product to be sent back to the factory for repair. The customer is responsible for the costs of disassembly and reassembly. We do accept field repairs and replacement labor from licensed electrical contractors but not without a written agreement signed by Picasso Lighting official. Failure to adhere to all warranty and certifications will void any recompense and the warranty.
- IBEW USA Union All fixtures are IBEW manufactured and assembled in the USA. UL listed for dry and damp locations.



Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.