



PICASSO LIGHTING INDUSTRIES, LLC
46 Sellers Street, Kearny, NJ 07032
201.246.8188

Indoor Distribution Test Report

Picasso Lighting Industries, LLC

46 Sellers St.
Kearny, NJ 07032

Photopia Photometric Analysis & Optical Design

Catalog Number

APX-PR-4x6-D7-I5-30-80-OW/MC

APEX 4'x6" - Sound Absorbing Panels - Direct/Indirect - Opal White/Matte Clear Lenses

Test Number

IES-P00261

Test Date

Fri Oct 11 11:01:37 2019

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Picasso Lighting Industries, LLC.

APX-PR-4x6-D7-I5-30-80-OW/MC
APEX 4'x6" - Sound Absorbing Panels - Direct/Indirect - Opal White/Matte Clear Lenses
LED (3000K 80+ CRI)



Image may differ slightly from actual unit.

Summary of Results

Output:

Watts:	57.05 W
Lumens:	5,114.41 lm
Efficiency:	N/A
Efficacy:	87.77 lm/W

Spacing Criterion


Two luminaires, plane 0°	1.21
Two luminaires, plane 90°	1.15
Four luminaires	1.3

Full Beam Angle

0° - 180°	285.63°
90° - 270°	286.11°

Calculated results may not be representative of field performance.
Ballast factors have not been applied.

Candela Polar Plot

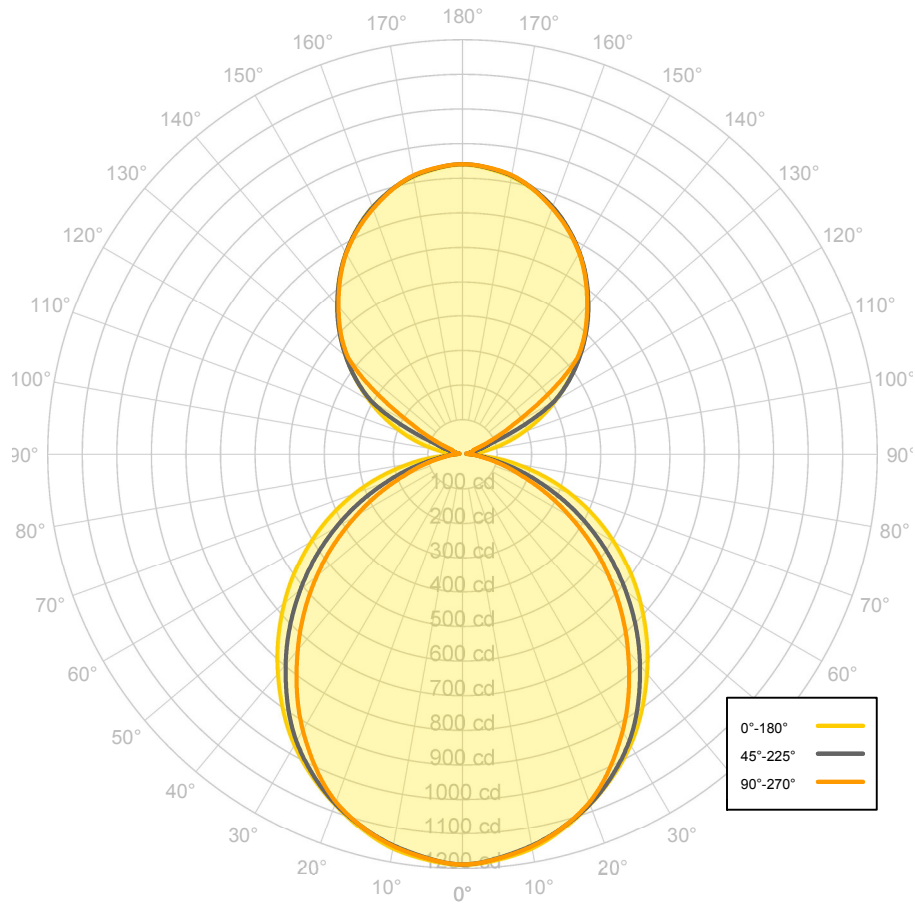

Zonal Lumen Summary

Zone	Lumens	% Fixture	Zone	Lumens	% Fixture
0° - 10°	200.84	3.93%	90° - 100°	24.48	0.48%
10° - 20°	312.01	6.10%	100° - 110°	71.99	1.41%
20° - 30°	464.11	9.07%	100° - 120°	252.87	4.94%
30° - 40°	541.71	10.59%	120° - 130°	312.68	6.11%
40° - 50°	538.21	10.52%	130° - 140°	383.63	7.50%
50° - 60°	460.86	9.01%	140° - 150°	383.58	7.50%
60° - 70°	326.95	6.39%	150° - 160°	327.26	6.40%
70° - 80°	170.98	3.34%	160° - 170°	220.27	4.31%
80° - 90°	52.00	1.02%	170° - 180°	141.99	2.78%
0° - 90°	3,067.67	59.98%	0° - 180°	5,114.41	100.00%



Candela Distribution

	0.00°	22.50°	45.00°	67.50°	90.00°
0.00°	1,190.24	1,190.24	1,190.24	1,190.24	1,190.24
10.00°	1,160.52	1,152.47	1,152.89	1,154.43	1,155.06
20.00°	1,079.16	1,080.76	1,079.93	1,081.47	1,074.57
30.00°	972.44	972.25	963.81	939.97	926.92
40.00°	830.33	831.56	798.70	762.23	744.43
50.00°	672.48	668.03	615.37	567.40	553.39
60.00°	505.32	485.05	422.11	370.85	354.14
70.00°	331.59	296.73	229.53	188.19	174.61
80.00°	153.21	110.20	69.86	59.31	57.98
90.00°	14.54	9.27	9.51	9.39	9.39
100.00°	78.64	42.20	21.98	24.68	25.22
110.00°	186.18	182.27	83.72	35.85	34.17
120.00°	311.30	314.59	307.42	217.12	167.54
130.00°	439.41	442.72	444.29	438.41	433.98
140.00°	564.05	566.90	565.94	564.29	560.54
150.00°	674.37	677.39	675.26	672.27	673.68
160.00°	762.35	761.32	761.37	761.00	757.25
170.00°	816.70	815.39	818.19	819.05	819.80
180.00°	839.48	839.48	839.48	839.48	839.48

Average Luminaire Luminance [cd/m²]

	0.00°	45.00°	90.00°
0.00°	14,123	14,123	14,123
45.00°	11,195	4,508	3,422
55.00°	10,321	3,222	2,281
65.00°	9,245	2,033	1,307
75.00°	7,553	968	583
85.00°	4,673	275	177



Coefficients of Utilization – Zonal Cavity Method

Values are lumens delivered to the workplane.

	pf_c	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	
	pc_c	80%	80%	80%	80%	70%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
RCR	0	5,601	5,601	5,601	5,601	5,233	5,233	5,233	5,233	4,546	4,546	4,546	3,917	3,917	3,917	3,339	3,339	3,339	3,068
	1	5,128	4,908	4,711	4,533	4,785	4,595	4,423	4,268	4,008	3,881	3,764	3,469	3,376	3,291	2,972	2,907	2,846	2,609
	2	4,682	4,305	3,993	3,731	4,363	4,036	3,762	3,530	3,531	3,322	3,143	3,065	2,909	2,773	2,633	2,520	2,420	2,210
	3	4,283	3,800	3,426	3,128	3,989	3,567	3,237	2,970	3,130	2,873	2,662	2,725	2,529	2,365	2,349	2,203	2,079	1,891
	4	3,929	3,377	2,973	2,665	3,660	3,176	2,816	2,537	2,795	2,511	2,287	2,441	2,222	2,044	2,112	1,945	1,807	1,638
	5	3,617	3,023	2,608	2,302	3,370	2,847	2,475	2,196	2,514	2,217	1,989	2,203	1,970	1,787	1,914	1,734	1,589	1,437
	6	3,342	2,724	2,309	2,012	3,116	2,569	2,195	1,924	2,276	1,975	1,750	2,003	1,763	1,579	1,746	1,559	1,412	1,274
	7	3,099	2,470	2,062	1,777	2,892	2,334	1,964	1,702	2,074	1,774	1,554	1,832	1,590	1,409	1,604	1,412	1,266	1,141
	8	2,884	2,253	1,857	1,584	2,695	2,132	1,771	1,520	1,902	1,605	1,393	1,685	1,444	1,268	1,481	1,289	1,145	1,030
	9	2,693	2,067	1,683	1,424	2,520	1,959	1,609	1,369	1,753	1,462	1,259	1,559	1,321	1,151	1,375	1,184	1,043	938
	10	2,524	1,906	1,536	1,290	2,364	1,809	1,470	1,242	1,624	1,341	1,146	1,448	1,216	1,051	1,283	1,094	957	861

Cone of Light

Mtg Height	Light Level	0°-180° Beam Diameter	90°-270° Beam Diameter
6 ft	33 fc	0 ft	0 ft
8 ft	19 fc	0 ft	0 ft
10 ft	12 fc	0 ft	0 ft
12 ft	8 fc	0 ft	0 ft
15 ft	5 fc	0 ft	0 ft