

VARIO series LED Downlight, Continuously Rowed, Gypsum Ceiling



PICASSO LIGHTING

INSTALLATION PROCEDURE (Sheet 1 of 3)

DO NOT DISCARD


PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.

Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.


Before Beginning Installation, Locate the Following Components, Gather Required Tools:

Fixtures With Flanges Provided As BOR (Beginning Of Run), MOR (Middle Of Run, EOR (End Of Run) And IND (Individual). (See Approved Submittal Drawings For Locations).

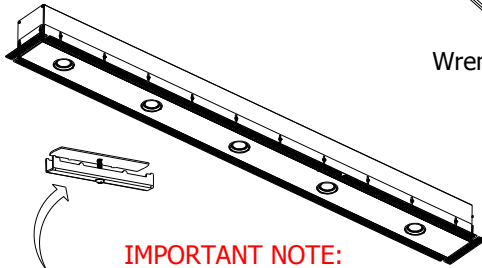

IMPORTANT NOTE:

Fixtures are shipped with "spacing braces" To maintain proper fixture opening, braces must be installed until fixture is properly installed in ceiling.

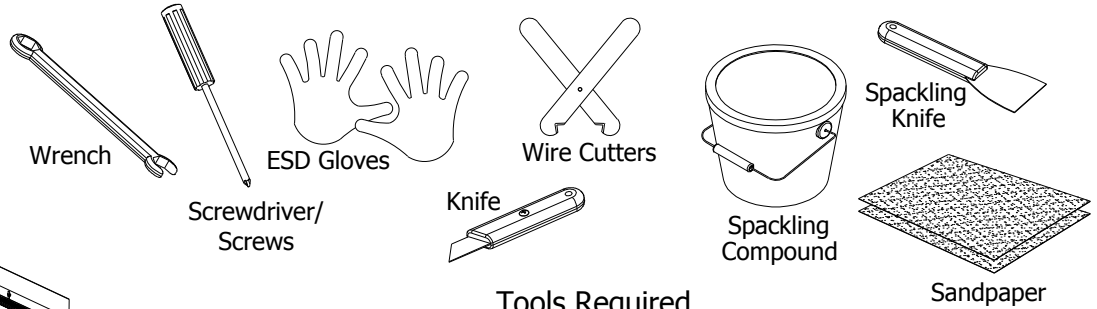


(2) Persons Required to Complete Installation.

Tools Required (Not Provided)


Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM - 5:00PM

To Begin Installation, Provide Ceiling Opening and Blocking:

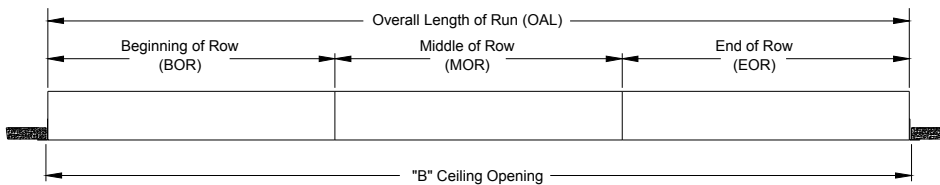


Fixture Run	Ceiling Opening "A"	"B"
2 FT.	4 7/8"	24 7/8"
3 FT.	4 7/8"	36 7/8"
4 FT.	4 7/8"	48 7/8"
5 FT.	4 7/8"	60 7/8"
6 FT.	4 7/8"	72 7/8"
7 FT.	4 7/8"	84 7/8"
8 FT.	4 7/8"	96 7/8"
Runs	4 7/8"	*

* For Continuous Runs, Add 7/8" To O.A.L.




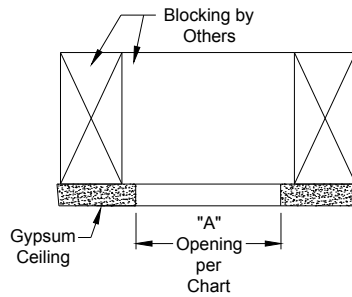


Blocking Must Be Adequately Secured To Support The Weight Of The Fixture(s).

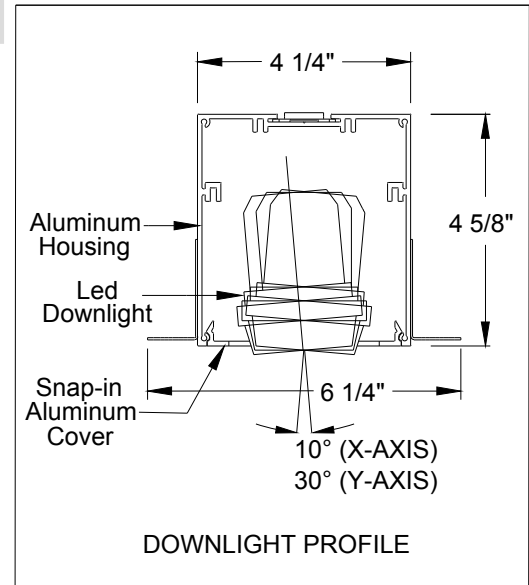

To Begin Installation:

POWER OFF

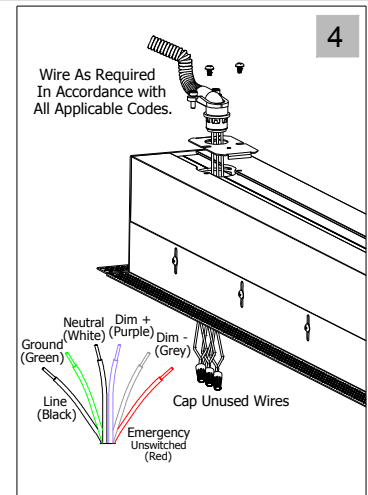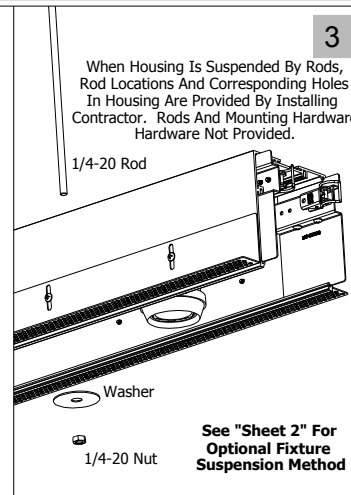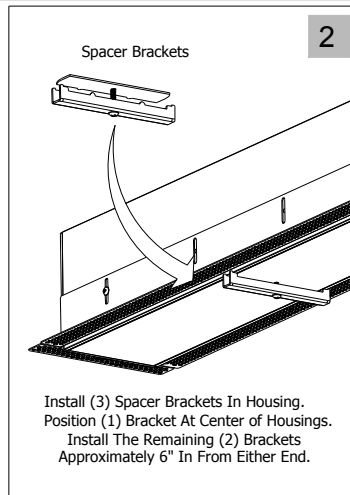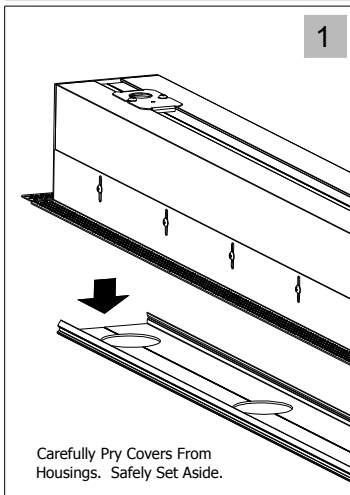

INSTALLATION PROCEDURE (Sheet 2 of 3)

DO NOT DISCARD










PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.

Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.


Continuing Installation

POWER OFF

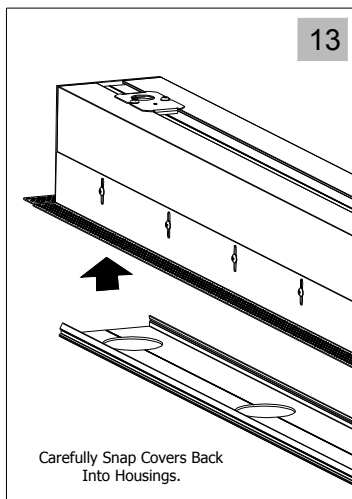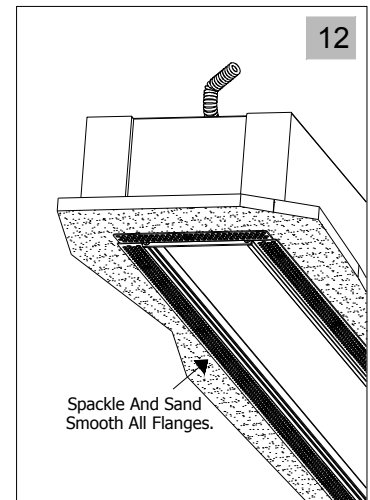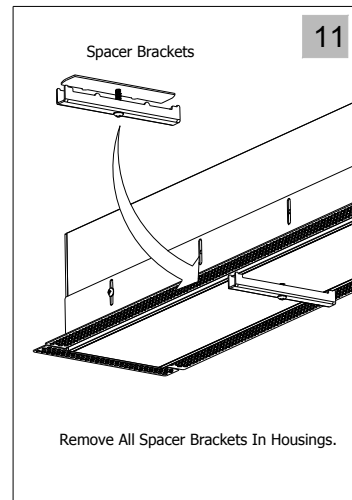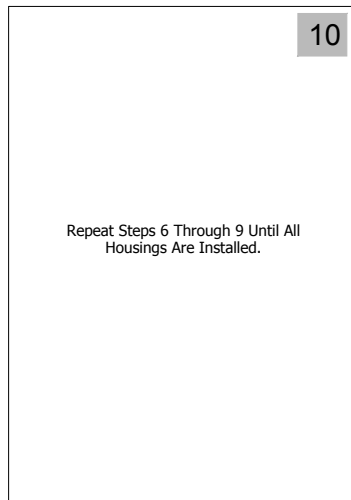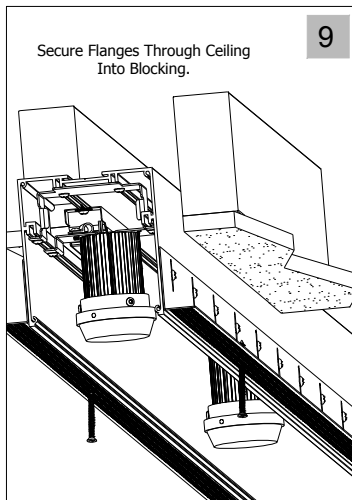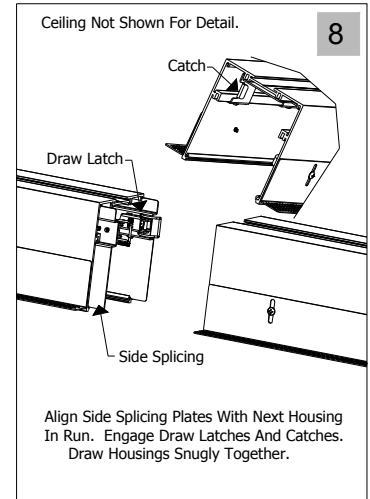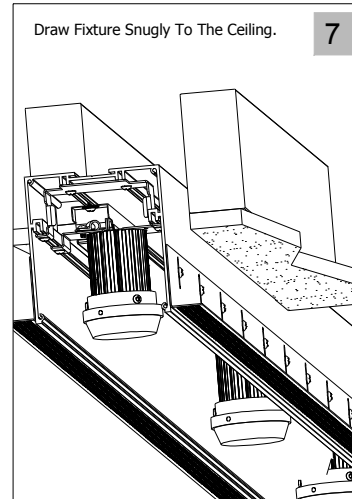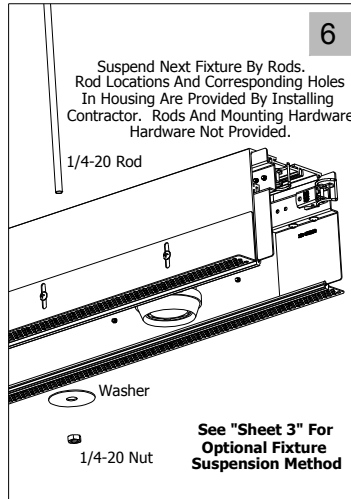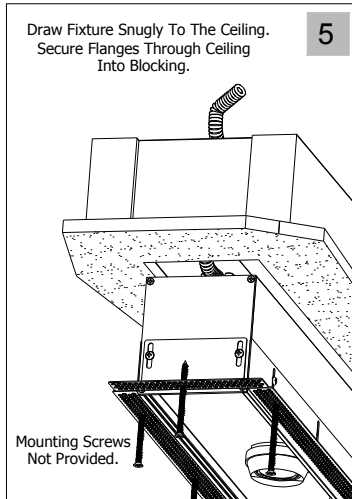

Optional Suspension Method

POWER OFF

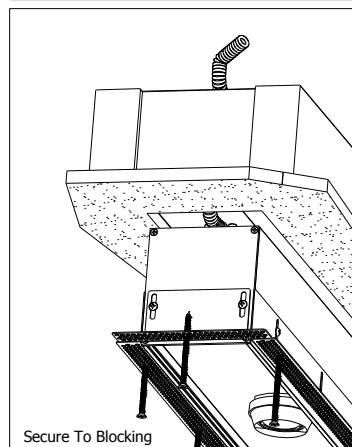



If Blocking Has been Determined That It
Can Support The Fixture Weight, Housings
Can Be Supported As Shown. Installing
Contractor To Provide Sufficient Hardware
To Adequately Support Fixture(s).

1/4-20 Rods Will Not Be Required.

Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM - 5:00PM

"EM" Battery Pack Activation

POWER OFF

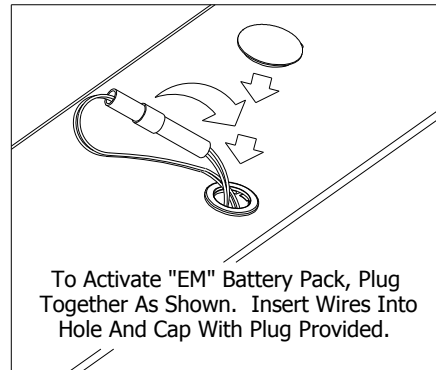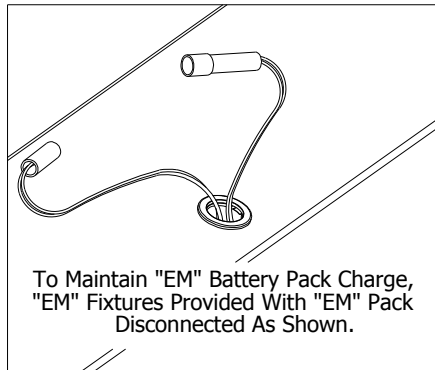

Installation and maintenance of the VARIO luminaire may only be performed by qualified and licensed electricians in accordance with all applicable codes and standards.

Picasso Lighting Industries, LLC assumes no responsibility or liability for any unauthorized changes or modifications to the VARIO luminaire.

The VARIO luminaire is not intended for outdoor use.

Picasso Lighting Industries, LLC. shall assume no responsibility or liability for the integrity of the mounting surface and structure as well as the integrity of all components not provided by Picasso Lighting Industries, LLC.

Turn off line voltage and allow luminaire to completely cool before performing any maintenance including routine cleaning of luminaire.

Avoid touching LED light emitting surfaces while installing, replacing or providing maintenance to the luminaire.

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%.

Color temperature (k) is subject to a tolerance of +/- 150k from the nominal value.

Any component contained in this luminaire can only be replaced by the manufacturer or an agent thereof.

Keep these INSTALLATION INSTRUCTIONS in a secure and readily accessible place for any future maintenance or for reference.

Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM -
5:00PM

DO NOT DISCARD
PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.