


INSTALLATION PROCEDURE (Sheet 1 of 2)

DO NOT DISCARD**PLEASE READ CAREFULLY BEFORE BEGINNING INSTALLATION.**

Fixtures must be installed by licensed electricians in accordance with all local and national codes.

To prevent electrical shock, disconnect electrical supply before installing or servicing.


Before Beginning Installation, Locate the Following Components, Gather Required Tools:

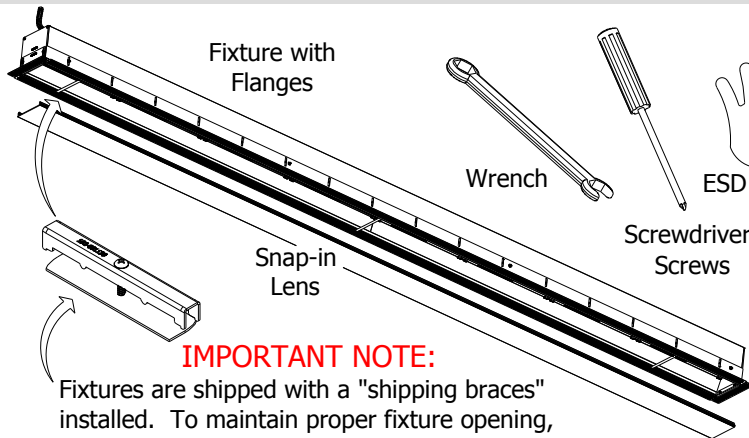**IMPORTANT NOTE:**

Fixtures are shipped with a "shipping braces" installed. To maintain proper fixture opening, brace must remain installed until fixture is properly installed in ceiling.


Tools Required
(Not Provided)

**(2) Persons Required
to Complete Installation.**




LINEAR ONLY

Reflected View (Lens Removed)


LINEAR /
DOWNLIGHT

Reflected View (Lens Removed)

DOWNLIGHT
ONLY

Reflected View

DOWNLIGHT LOCATIONS MAY BE ARRANGED
AT DESIGNER'S DISCRETION.
PLEASE ADVISE FACTORY.




Top Hole Pattern

Rod Support Holes
Feed Access Hole(s)

Refer To Submittal Drawing Or Contact Factory For Actual Hole Locations

To Begin Installation, Provide Ceiling Opening and Blocking:


Fixture Size	Ceiling Opening
2 FT.	4 7/8" X 24 7/8"
3 FT.	4 7/8" X 36 7/8"
4 FT.	4 7/8" X 48 7/8"
5 FT.	4 7/8" X 60 7/8"
6 FT.	4 7/8" X 72 7/8"
7 FT.	4 7/8" X 84 7/8"
8 FT.	4 7/8" X 96 7/8"

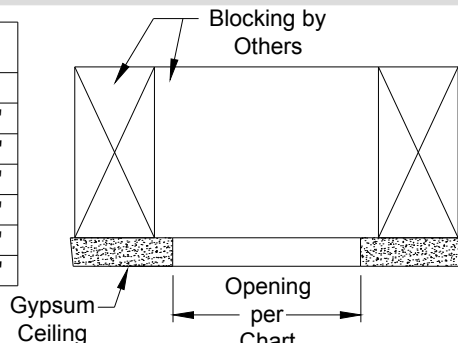


Gypsum
Ceiling

Opening
per
Chart

Blocking Must Be Adequately Secured To Support
The Weight of The Fixture(s).

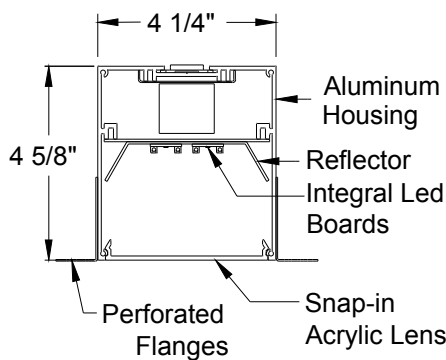

LINEAR PROFILE

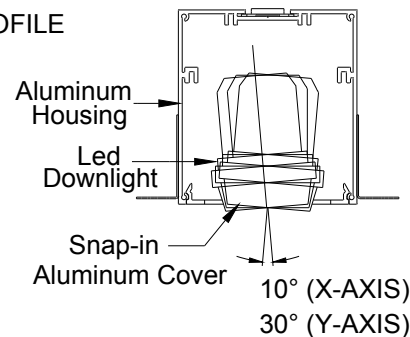

DOWNLIGHT PROFILE

Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM - 5:00PM









VARIO series LED Flush Lens, Individual, Gypsum Ceiling-mounted



PICASSO LIGHTING

INSTALLATION PROCEDURE (Sheet 2 of 2)



POWER OFF

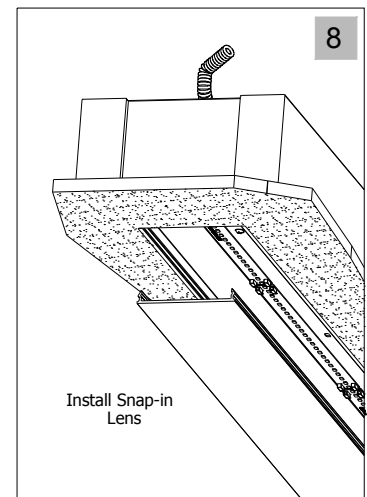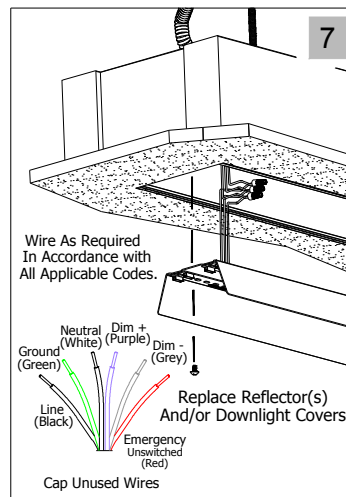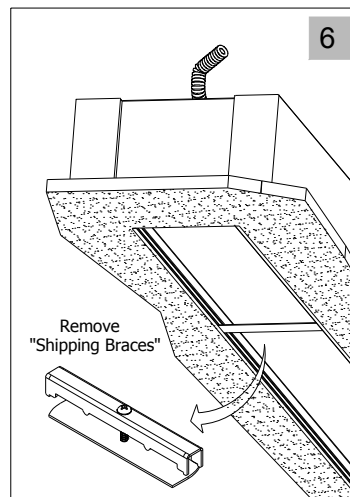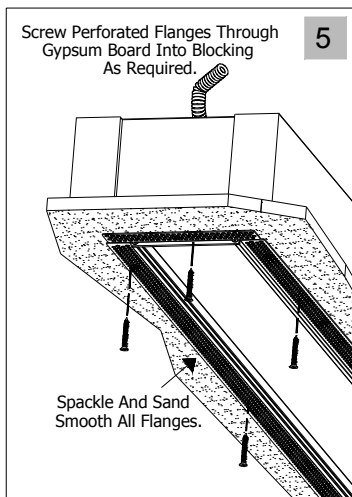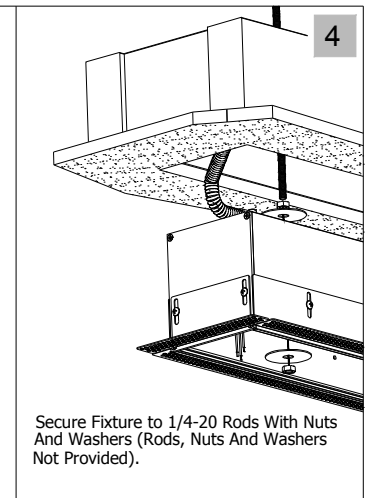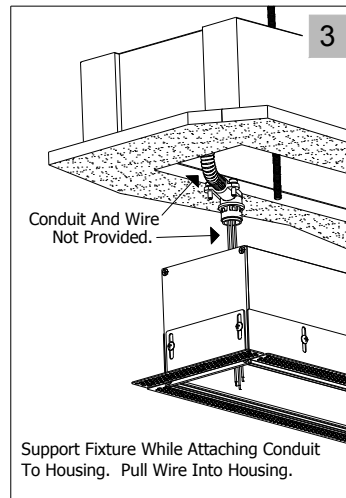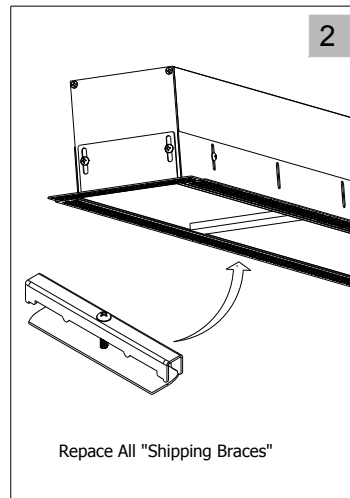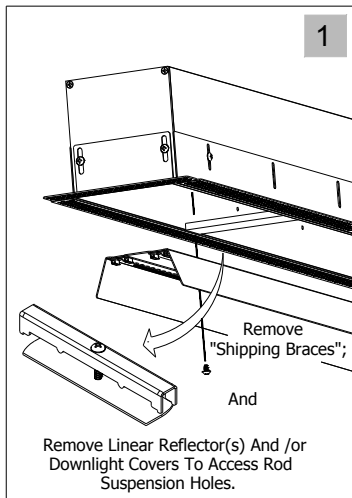

Service Hotline: 1-201-246-8188
Monday through Friday 9:00AM - 5:00PM

DO NOT DISCARD
PLEASE READ CAREFULLY BEFORE
BEGINNING INSTALLATION.

"EM" Battery Pack Activation

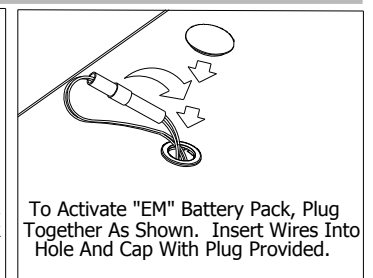

Installation and maintenance of the VARIO luminaire may only be performed by qualified and licensed electricians in accordance with all applicable codes and standards.

Picasso Lighting Industries, LLC assumes no responsibility or liability for any unauthorized changes or modifications to the VARIO luminaire.

The VARIO luminaire is not intended for outdoor use.

Picasso Lighting Industries, LLC. shall assume no responsibility or liability for the integrity of the mounting surface and structure as well as the integrity of all components not provided by Picasso Lighting Industries, LLC.

Turn off line voltage and allow luminaire to completely cool before performing any maintenance including routine cleaning of luminaire.

Avoid touching LED light emitting surfaces while installing, replacing or providing maintenance to the luminaire.

Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%.

Color temperature (k) is subject to a tolerance of +/- 150k from the nominal value.

Any component contained in this luminaire can only be replaced by the manufacturer or an agent thereof.

Keep these INSTALLATION INSTRUCTIONS in a secure and readily accessible place for any future maintenance or for reference.