

Truss Downlight


PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Overview

- in-dus-tri-al /in'destreal/ adjective; relating to or characterized by industry.
- Truss/tres/ noun; a framework, typically consisting of rafters, posts, and struts, supporting a roof, bridge, or other structure.
- Truss Series was designed to recreate an industrial looking truss.
- DESIGNER SELECTIONS
- Truss Series has 2 profile sizes , Standard is three and one quarter width and six inches in height. Mini truss is three and one quarter inches in width and four and three quarters inches in height.
- Truss Series has 2 options for LED sources: They are, linear, slightly regressed lens , and downlight version.
- Truss Series has multiple choices for canopies and colors, just scroll down for your choices.
- Truss Series is available in almost any CCT available in the market, we've selected the most popular , but don't let that stop you from asking for something different.
- Truss Series is available in direct only and direct/indirect for both liners lens and downlight in standard and mini. We can also tune in our drivers to specific lumen output if required.
- Truss Series is always available for your projects special customization needs, just contact your local agent.
- Truss Series qualifies as "Made in America" and is part of our ECO sustainable end of life program.
- For all: ies files, pictures, instructions, rfa files, and warranties...scroll to bottom.
- Please be advised that our Truss Series is available in Surface, Pendant and Wall.

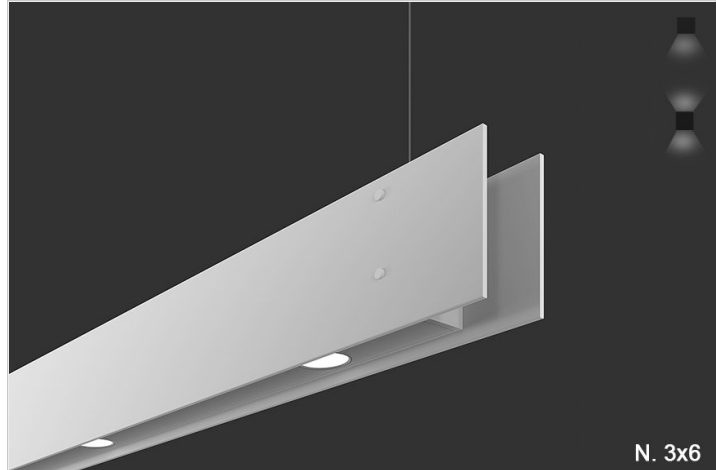

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Ordering Format

PART NUMBER: TRUD-PQ

| Size | Lumens Direct | Lumens Indirect | CCT Available | CRI Available |
|---|---|---|--|---|
| 4 = 4 Feet / 3 downlights | Q132 = Downlight 1350 Lumens 20 Degree | I3 = 350 LPF | 27 = 2700 Kelvins | 80 = 80-85 CRI |
| 6 = 6 Feet / 4 downlights | Q123 = Downlight 1250 Lumens 30Degree | I5 = 500 LPF | 30 = 3000 Kelvins | 90 = 90-95 CRI |
| 8 = 8 Feet/ 6 downlights | | I7 = 750 LPF | 35 = 3500 Kelvins | |
| 12 = 12 Feet/ 9 downlights | | I10 = 1000 LPF | 40 = 4000 Kelvins | |
| CL = Custom Length or # of downlights , add in notes | | NN = Not Needed | TW = Tunable White 2700-5000 Kelvins | |
| Direct Optics | Mounting | Driver / Voltage | Fixture Finish | Canopy/Power Cord Color |
| SR = Specular Reflector Downlight | AC1R = Round 5in Canopy JBox - 5in Support | ND 1 = Non-Dim Universal 120VAC | W = Standard White | CWPW = Canopy White/Power Cord White |
| SR/MC = SR -Specular Reflector / I-Matte Clear Uplight | AC1S = Square 5in Canopy JBox - 5in Support | ND 2 = Non-Dim Universal 277VAC | BK = Standard Black | CWPB = Canopy White/Power Cord Black |
| BW = Batwing uplight only | ACD1R = Round 5in Canopy JBox - 2in Support Slot Grid | ZT 1 = 0-10v dimming 120v dual 1% | SVR = Standard Silver | CBPB = Canopy Black/Power Cord Black |
| SR/BW = SR- Specular reflector/ I-BATWING | ACD1S = Square 5in Canopy JBox - 2in Support Slot Grid | ZT 2 = 0-10v dimming 277v dual 1% | RAL = Enter RAL # in notes section | CBPW = Canopy Black/Power Cord White |
| | ACD2R = Round 5in Canopy JBox - 2in Support T Grid | CC = Custom Control - add in notes | DW/LW = Plated Aluminum-enter plated finish in notes | |
| | ACD2S = Square 5in Canopy JBox - 2in Support T Grid | LE1 = Lutron EcoSystem 1% DLC EE CCR/PWM SoftOnFadeToBlack | CW = Standard Wood Finish - see wood PN # enter in notes. | |
| | ACUR = Round 5in Canopy JBox - .5in Support Unistrut | POE1 = POE-Igor Node | SW = Special pattern submitted by designer | |
| | ACUS = Square 5in Canopy JBox - .5in Support Unistrut | | AA = Anodized Aluminum -enter PN in notes section | |
| | ACRR = Round 5in Canopy JBox - 2in Support 1/4 Rod | | | |
| | ACRS = Square 5in Canopy JBox - 2in Support 1/4 Rod | | | |
| Options | | | | |
| AWN = Lutron Athena Wireless Node (RF only) | | | | |
| AWNS = Lutron Athena Wireless Node (with Sensor) | | | | |
| 2C = 2 circuit wiring for downlight selection | | | | |
| OS = Occupancy Sensor | | | | |
| EMD = Emergency Driver - Battery Backup | | | | |

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE
PROJECT

120-277VAC
IW = Inverter Wiring
CA = Custom Angle,
add in notes

NOTES

ORDER NUMBER:

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Construction & Mounting

HOUSING

Side panels and end details are 1/4" x 6" thick extruded aluminum and are supplied in nominal lengths of 4 ft., 6 ft., 8 ft. and 12 ft. Side panels are secured with decorative thumb screws. Side panels do not need to be removed during installation or for maintenance. Fixtures may be continuously rowed (contact factory for details). Internal components are constructed from min. 20 gauge die-formed steel. Easy access to driver and LED boards. Custom sizes are available.

REFLECTOR

Integral powder-coated LED housings with excessive reflectivity for increased lumen output is built into our luminaires

FINISH


Standard powder-coated colors are white, black and silver. Custom processed wood finishes, aluminum anodized finishes, chrome/gold plating and custom finishes are available as well. We also accept RAL and Pantone numbers for powder-coating color choices.

OPTICS

Direct component are our factory made downlights in various beam spreads. Indirect LED strips are mounted in an extruded aluminum channel with an integral clear acrylic dust cover.

MOUNTING

Cable mounting with various size canopies and power feeds. If not selected in options, canopy color and cord will be white. Cable uses gripper style locking for field adjustments 48" standard. Canopy mounts to standard J-box. See options for more information.

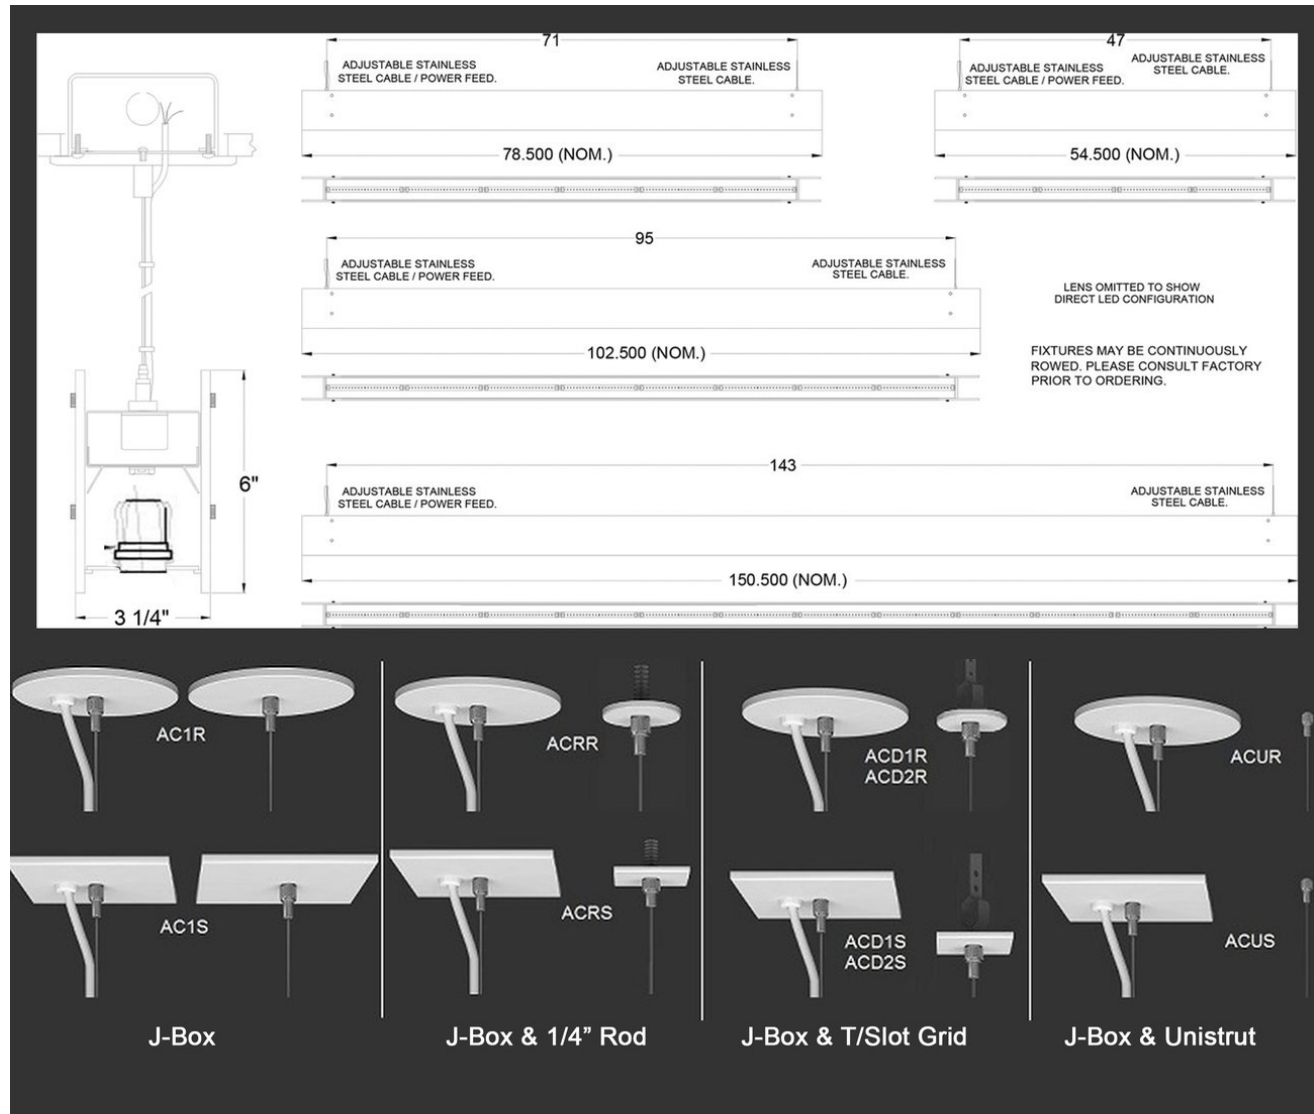




Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

Standard Finishes






White
W

Black
BK

Silver
SVR

Anodized Aluminum

xxxx-B for Aluminum to be Brushed


Anodized Black
AABK

Anodized DK. Bronze
AADB

Anodized LT. Bronze
AALB

Anodized Champagne
AALC

Anodized Clear
AACL



Custom RAL - Custom finishes go to: tiger-coatings.com **Add # in Notes**





Standard Finishes – colors are powder coated and do not add to delivery lead time.

Anodized Aluminum – can be smooth or brushed, color can vary fixture to fixture and adds 2-3 weeks to lead time. Anodized finish is limited in fixture size.

Plated Aluminum – is a mirror finish in chrome and gold and adds 2 weeks to lead time.

Wood Finishes – so realistic, wood finish can add up to 3-4 weeks to lead time.

Plated Aluminum



Antique Brass
APAB

Aged Bronze
APBZ

Polished Chrome
APPC





Polished Gold
APPG

Wood Finishes

Light Bamboo
LW01

Light Pine
LW02










Teak
LW03

Dark Bamboo
LW04

Dark Cherry
LW05

Brushed Chestnut
LW06










Chestnut
DW01

Dark Chestnut
DW02

Cherry
DW03

Dark Mahogany
DW04

Mahogany
DW05

Walnut Pine
DW06

Dark Walnut Oak
DW07

Consult Factory

Electrical / Driver

- Drivers - Our drivers are specifically selected based on fixture application to ensure ultimate reliability and long life. We use only UL recognized brands of LED drivers. Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming. Please note, 277v has longer distances from power feed to power feed then 120v.
- If required, we can supply premium drivers such as Lutron, Eldoed and others upon request. Advanced control systems compliant drivers such as POE, DALI, DMX, etc. are also available, please consult factory.
- Rated life (90% survivorship) of 50,000 hours at 50° C max. ambient (and 70° C max. case) temperature. At maximum driver load: Efficiency >84%, PF>0.9, THD
- Our LED drivers feature HPF (high power factor), universal voltage 110 - 277 VAC and include 0-10V dimming.
- Emergency drivers are factory installed as an option, long life, high temperature, recyclable Ni-Cad battery pack with test switch and charge indicator. EMR is minimum of 90 minutes operation to meet code.
- POE - We are working with Molex/Igor POE systems. We can add a POE driver into our fixtures or remote them. Based on the fixture you select, we will notify you (or you can contact the factory) to see if we can install the P-driver or the P-driver needs to be remote. Just add POE1 in the spec and we will advise. Please keep in mind you need to specify a complete POE control system before specifying POE1.

LED Performance

| LED Output | CCT Color Temp | Watts | Lumens | Lumens per Watt | CCT Multiplier |
|------------|----------------|------------------|----------|-----------------|----------------|
| Medium 20d | 3000 | 12.71 TW | 1360 TL | 107 | 2700=.95 |
| Medium 30d | 3000 | 12.71 TW | 1250 TL | 107 | 3000 = 1 |
| Low | 3000 | 3.4 WPF Indirect | 350 LPF | 82 | 2700=.95 |
| Medium | 3000 | 4.8 WPF Indirect | 500 LPF | 81 | 3000=1.00 |
| High | 3000 | 7.3 WPF Indirect | 750 LPF | 80 | 3500= 1.01 |
| Very High | 3000 | 9.7 WPF Indirect | 1000 LPF | 79 | 4000 = 1.03 |

- The table above is a quick reference. When calculating loads make sure you add direct and indirect LPW to get total wattage. Please refer to photometric report for detailed information.
- Our light engines are precisely designed for optimal operation of LED assemblies.
- Our standard LED's CCT (correlated color temperature) range is 2700K to 4000K. Other CCT values are available upon request.
- We log LED bin codes for each project we supply to ensure color consistency and keep a record of those projects for future reference.
- CRI offered is 80+, and 90+ Note: on 90+ CRI use .85 multiplier
- Tunable white, warm dim and other special LED colors available.
- Custom Lumens Available
- We design our own printed circuit boards to ensure high luminescence efficiency, low thermal resistance and long-term reliable operation. As well as our downlights.
- Light engines are easily replaced.
- We use only recognized brand LED's with 3 SDCM (standard deviation color matching) with high color consistency. 2 SDCM available upon request.
- If you require a special LED manufacturer, please contact us. LED chip manufacturers used by Picasso are primarily (but not limited to) Nichia, Cree and Samsung.
- LRP - "LED Reel Program" – LED's for printed circuit boards come on reels' like old 8mm projectors and they're sold in lots just like fabric. At Picasso Lighting, we have a program where we make sure all of your reels come from the same lot for each project. This ensures excellent color consistency in large open spaces.
- LED life is rated at 50,000 hours

Certifications & Warranties

Truss Downlight

PENDANT LARGE (INTEGRAL DRIVERS)

TYPE

PROJECT

- Limited five-year (50,000 hours) warranty on all products. Limited ten-year (100,000 hours) warranty on all Lutron drivers.
- I.C. rated fixtures are available upon request.
- Chicago Plenum and IC products are available upon request.
- Warranty does not cover damage caused by transport, damage caused by using the fixture in an area it is not UL rated for, damage caused by negligence, lack of maintenance, attempts to repair by unqualified or unauthorized personnel, by using non-original accessories/parts, fixtures installed in systems without power surge protection.
- UL and CUL listed for dry and damp locations.
- IBEW USA Union All fixtures are IBEW manufactured and assembled in the USA.
- We manufacture based on approved spec sheets and submittals signed by professionals responsible. Change orders must be in writing and will delay delivery.
- Picasso Lighting must receive in writing any thought to be defective products discovered, no later than 4 weeks from delivery to; ttoledo@picassoltg.com. Picasso Lighting will send a field technician to the site to evaluate the said defective product. We do accept field repair from licensed electrical contractors but not without a written agreement signed by Picasso Lighting official. Failure to adhere to all warranty and certifications will void any recompense and the warranty.



Note: Picasso lighting industries, LLC reserves the right to make any design changes which will not affect the overall appearance or performance of the product. All ceilings to be adequately reinforced by others. All fixtures to be wired by licensed electrician only. The information contained herein is the sole property of Picasso Lighting Industries, LLC and may not be used without prior written consent of Picasso Lighting Industries, LLC. The 'USGBC member logo' is a trademark owned by the U.S. Green building council and is used by permission. The logo signifies only that Picasso Lighting Industries, LLC is a USGBC member; USGBC does not review, certify, or endorse the products or services offered by its members.